


### Absolute maximum ratings





( $T_a=25^\circ\text{C}$ )

| Symbol         | Ratings                                       |      | Unit               |
|----------------|-----------------------------------------------|------|--------------------|
|                | NPN                                           | PNP  |                    |
| $V_{CBO}$      | 60                                            | -60  | V                  |
| $V_{CEO}$      | 60                                            | -60  | V                  |
| $V_{EBO}$      | 6                                             | -6   | V                  |
| $I_c$          | 6                                             | -6   | A                  |
| $I_{CP}$       | 12 ( $PW \leq 1\text{ms}$ , $D_u \leq 50\%$ ) |      | A                  |
| $I_B$          | 0.5                                           | -0.5 | A                  |
| $P_T$          | 5 ( $T_a=25^\circ\text{C}$ )                  |      | W                  |
|                | 25 ( $T_c=25^\circ\text{C}$ )                 |      |                    |
| $V_{ISO}$      | 1000 (Between fin and lead pin, AC)           |      | $V_{rms}$          |
| $T_j$          | 150                                           |      | $^\circ\text{C}$   |
| $T_{stg}$      | -40 to +150                                   |      | $^\circ\text{C}$   |
| $\theta_{j-c}$ | 5                                             |      | $^\circ\text{C/W}$ |

### Equivalent circuit diagram

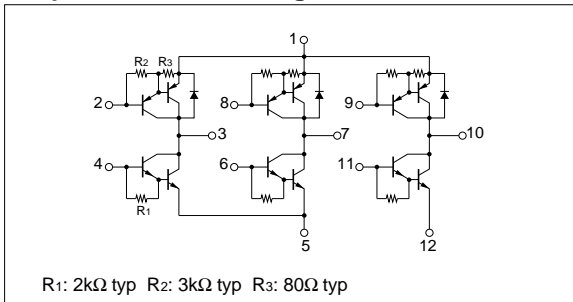

### Characteristic curves

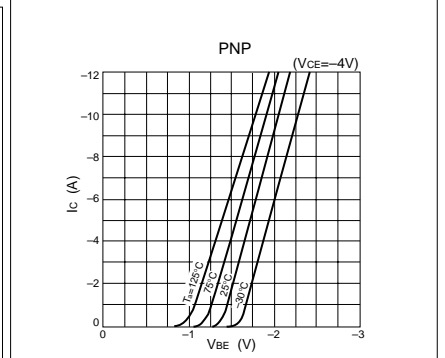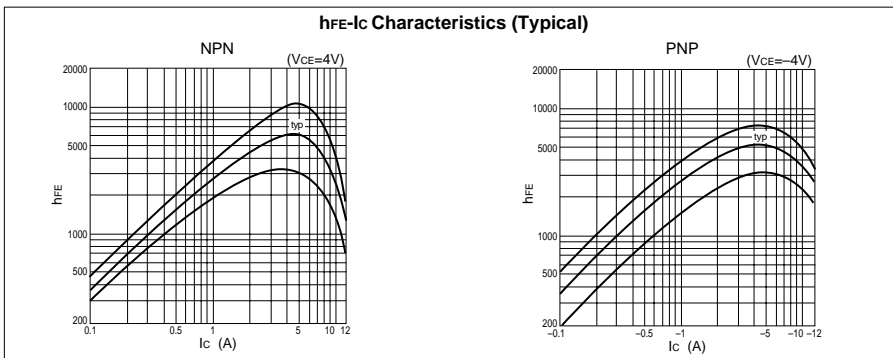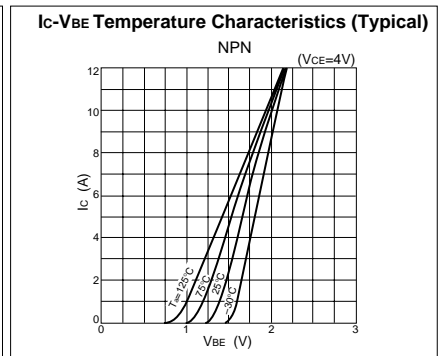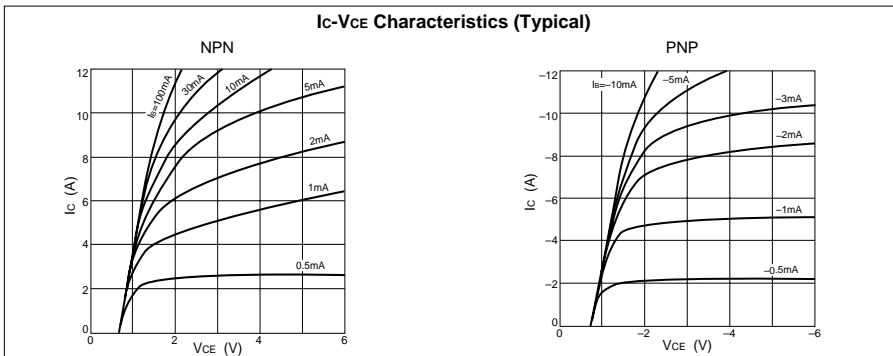


## Electrical characteristics


( $T_a=25^\circ\text{C}$ )

| Symbol        | NPN           |      |       |               |                                                                    | PNP           |      |       |               |                                                                      |
|---------------|---------------|------|-------|---------------|--------------------------------------------------------------------|---------------|------|-------|---------------|----------------------------------------------------------------------|
|               | Specification |      |       | Unit          | Conditions                                                         | Specification |      |       | Unit          | Conditions                                                           |
|               | min           | typ  | max   |               |                                                                    | min           | typ  | max   |               |                                                                      |
| $I_{CBO}$     |               |      | 10    | $\mu\text{A}$ | $V_{CB}=60\text{V}$                                                |               |      | -10   | $\mu\text{A}$ | $V_{CB}=-60\text{V}$                                                 |
| $I_{EBO}$     |               |      | 10    | $\mu\text{A}$ | $V_{EB}=6\text{V}$                                                 |               |      | -10   | $\text{mA}$   | $V_{EB}=-6\text{V}$                                                  |
| $V_{CEO}$     | 60            |      |       | $\text{V}$    | $I_C=25\text{mA}$                                                  | -60           |      |       | $\text{V}$    | $I_C=-25\text{mA}$                                                   |
| $h_{FE}$      | 2000          | 5000 | 12000 |               | $V_{CE}=4\text{V}, I_C=5\text{A}$                                  | 2000          | 5000 | 12000 |               | $V_{CE}=-4\text{V}, I_C=-5\text{A}$                                  |
| $V_{CE(sat)}$ |               |      | 1.5   | $\text{V}$    | $I_C=5\text{A}, I_B=10\text{mA}$                                   |               |      | -1.5  | $\text{V}$    | $I_C=-5\text{A}, I_B=-10\text{mA}$                                   |
| $V_{BE(sat)}$ |               |      | 2.0   | $\text{V}$    |                                                                    |               |      | -2.0  | $\text{V}$    |                                                                      |
| $V_{FEC}$     |               |      |       | $\text{V}$    |                                                                    |               |      | 2.0   | $\text{V}$    |                                                                      |
| $t_{rr}$      |               |      |       | $\mu\text{s}$ |                                                                    |               | 1.0  |       | $\mu\text{s}$ | $I_{FEC}=\pm 0.5\text{A}$                                            |
| $t_{on}$      |               | 0.8  |       | $\mu\text{s}$ | $V_{CC}=\pm 25\text{V}, I_C=5\text{A}, I_{B1}=-I_{B2}=10\text{mA}$ |               | 1.0  |       | $\mu\text{s}$ | $V_{CC}=\pm 25\text{V}, I_C=-5\text{A}, I_{B1}=-I_{B2}=-10\text{mA}$ |
| $t_{stg}$     |               | 6.0  |       | $\mu\text{s}$ |                                                                    |               | 1.4  |       | $\mu\text{s}$ |                                                                      |
| $t_f$         |               | 2.0  |       | $\mu\text{s}$ |                                                                    |               | 0.6  |       | $\mu\text{s}$ |                                                                      |
| $f_T$         |               | 80   |       | $\text{MHz}$  |                                                                    |               | 120  |       | $\text{MHz}$  |                                                                      |
| $C_{ob}$      |               | 100  |       | $\text{pF}$   | $V_{CB}=10\text{V}, f=1\text{MHz}$                                 |               | 150  |       | $\text{pF}$   | $V_{CB}=-10\text{V}, f=1\text{MHz}$                                  |


## Characteristic curves

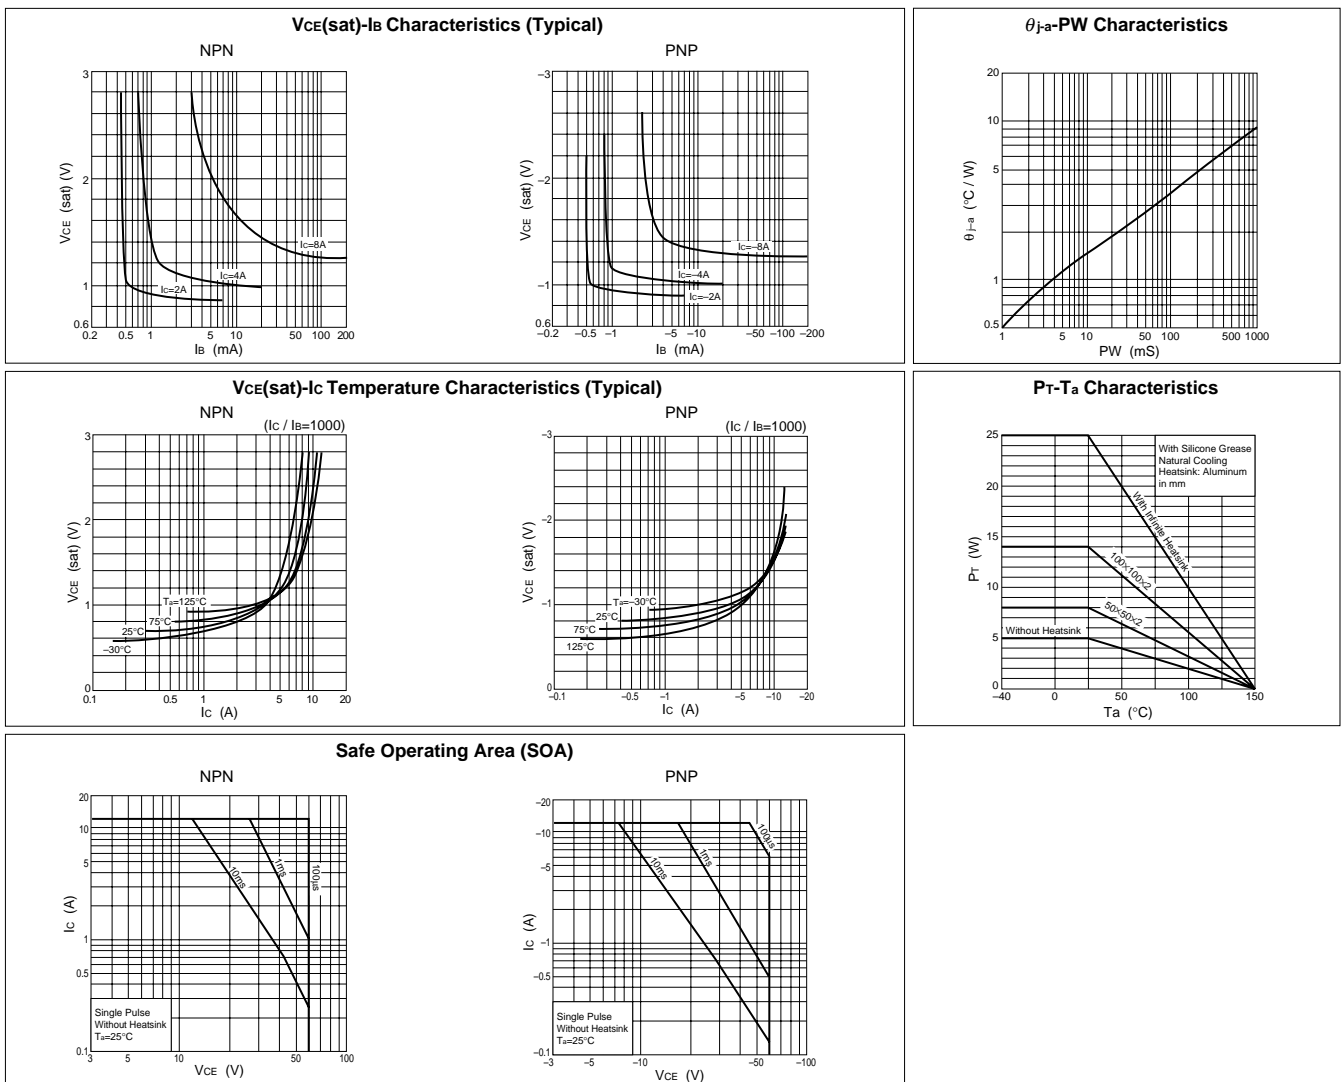


• SIP 8 (STA8Pin)

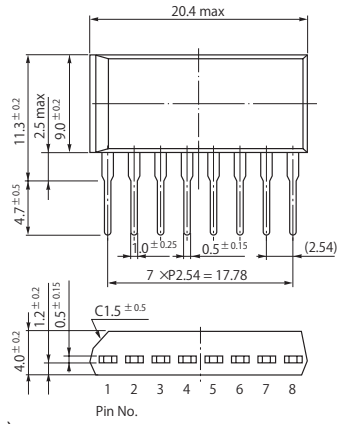


• SIP 10 (STA10Pin)

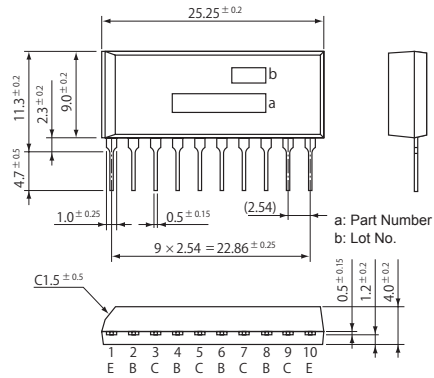


• SIP 12 (SMA12Pin)

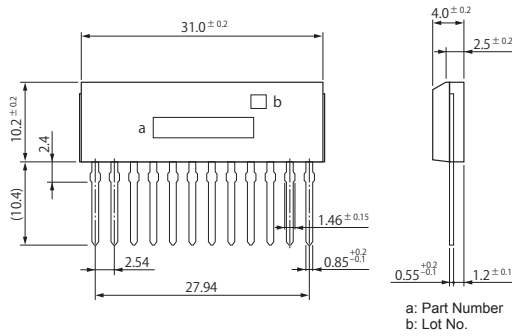


• SIP 15 (SMA15Pin)

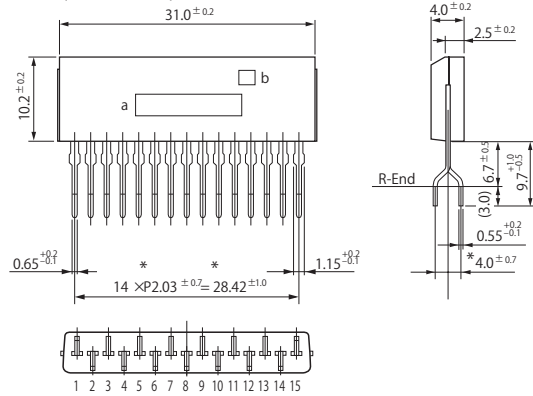


• SIP 12 with Fin (SLA12Pin)

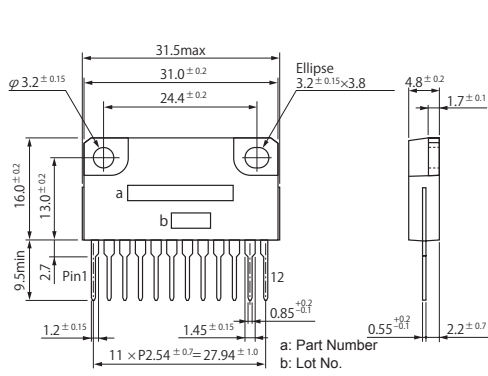

• SIP 15 with Fin (SLA15Pin)

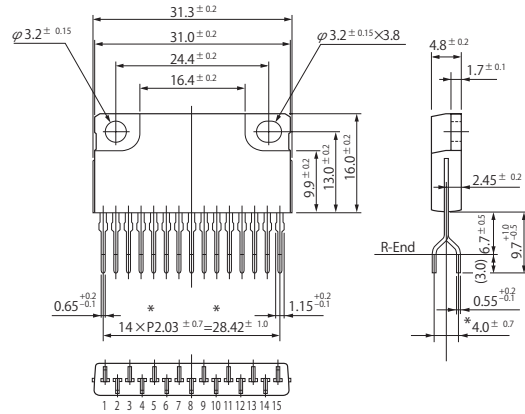

• SIP 21 with Fin (SLA21Pin)

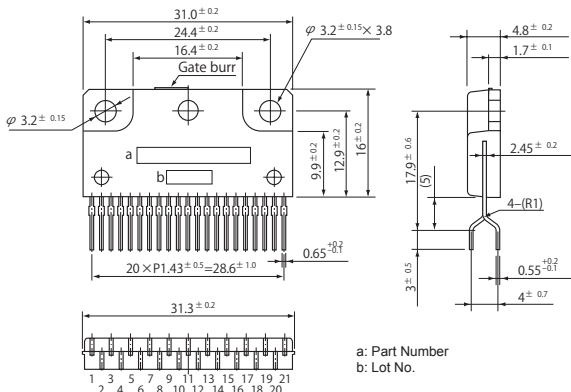

(Unit:mm)