

## SWJ Series

# Table of Contents

1 Safety Precautions	P.3
2 Specification Standards	P.6
3 Dimensional Outline Drawing	P.11
4 Model Name Generic Examples, Options	P.19
5 Terminal Connection	P.20
6 Derating	P.21
7 Mounting Method	P.23
8 Dynamic Load	P.25
9 Remote ON/OFF Controls	P.25
10 Expected life	P.26
11 Warranty period	P.26

# 1. Safety Precautions



## Safety Requests

(Please note the following points when using this product.)

- 1 Before using the product, please read the "Owner's Manual" and "Detailed Specification" well and use it correctly.
- 2 This switching power source is a direct-current stabilization power source with a special structure designed for embedded devices.  
Use only for embedded devices.
- 3 We are striving to improve the quality and reliability of our products. However, we ask our purchasers to be responsible for designing the safety of equipment so that if this switching power source is used, it will not infringe on life, body or property due to malfunctions or breakdowns.
- 4 This product is not intended to be used in equipment or devices that require extremely high reliability (such as aerospace equipment, nuclear power control, and medical equipment (Class III or higher in Japanese laws and regulations) whose failure or malfunctioning may harm lives or human bodies) (hereinafter referred to as "application-specific").  
We shall not be liable for any damage caused to our customers or third parties by using our products for specific purposes.
- 5 Regarding the following applications and equipment that are involved in human health and have a significant impact on the maintenance of public functions, ensure that the equipment side has adequate fail-safe functions through the redundancy of systems and other measures.
  - Use in trains, elevators, and other equipment that could lead to injury or other damage to human lives.
  - Used in automotive, marine, and other applications and equipment that are subject to fluctuations and shocks.
  - Use in transportation systems and other uses and equipment that have the potential to have a serious social and public impact.
  - Use for similar applications and equipment.
- 6 Please adhere to the following guidelines when using this product.
  - Do not disassemble, repair, or remodel.
  - There is a high voltage within the power supply.
  - Use within the specified range of input voltage, frequency, output voltage, and current.
  - Please strictly observe the specified environmental conditions, such as the environmental temperature and the temperature of the environment.
  - Installation and installation methods are determined for each model.  
Do not install or install in a direction outside the designated direction.

- This document shows matters that should be noted in particular in order to prevent harm to you and other people and damage to property, and to ensure the safe use
- This switching power source is a direct-current stabilizing power source with a special structure designed for installation and use in machinery and equipment. Avoid using a single power source.
- For the sake of safety, the product should be handled by anyone with electrical knowledge.

Presentation and implications of safety cautions

Before installation, operation and maintenance, be sure to thoroughly read this "Safety Precautions" and the manual and use it correctly.  
 In this book, safety precautions are categorized as "danger" and "caution."




**Risk**

If the product is used without observing the information given under this symbol, serious injury or death may result.



**Note**

If you ignore this indication and mistreat it, you may be injured.

※ The matters described in  may lead to significant results in some circumstances. Therefore, be sure to follow the instruction, for every item described is very important.

<Meanings of Figures>



General Prohibitions



May cause electric shock





General mandates



Risk of fire

■ Important warnings

<b>Risk</b>	
	<p>May cause electric shock</p> <p>There is a high-voltage circuit inside the company, which could lead to death or serious injury due to an electric feeling if it is incorrectly touched.</p>
	<p>Risk of fire</p> <p>In the event of odor, noise, smoke, or fire from the device, immediately stop the device and cut the AC input by turning off an external input breaker. Please contact your retailer or we.</p> <p><u>In the unlikely event of a fire, use a fire extinguisher for electric fire (powdered or ABC) and avoid fire extinguishment with water.</u></p>

■ Other important information

 **Note**

	Input and output conditions are determined for each model. Do not use under outside conditions.
	Make sure that the total power consumption of the connected load does not exceed the rating output of each power source. If used in an overloaded condition, it may result in a fire.
	Please use a fat line that matches the input/output capacity of the power source for the circuit board for I/O. Fire may occur if the wire is thin.
	Do not use or store the product in an environment where liquids enter it, or where the temperature, humidity or condensation deviates from the ambient conditions described in the catalog or instruction manual. This could cause product failure. When using in such an environment, please take waterproof measures or contact us.
	Please take anti-dust measures when using environments that contain a large amount of dust. If used in a state of accumulating dust, it could hinder heat dissipation and cause breakdowns and fires.
	Use the assigned size and length of the wire to install the power supply. Otherwise an electric shock or fire could occur.
	We do not anticipate the use of this product in equipment that requires high reliability, such as those related to human life. Do not use for specific applications (nuclear power control, space ship control, specific medical equipment, etc.).
	Please ensure that each input and output terminal is connected properly to avoid errors. There is a risk of product malfunctions, damage, or unexpected injury or fire.
	Do not place an external voltage at the output of the product. Internal devices may be destroyed.
	If used or stored in an environment that generates caustic gas (hydrogen sulfur, sulfur dioxide, etc.), the parts may break down, and should not be used or stored in such an environment. When using in such an environment, please take waterproof measures or contact us.
	If the product is used in an environment where radio, electric or magnetic fields are generated, the product may malfunction. Avoid use in such an environment because this could result in a failure.
	We strive to improve the quality and reliability of our products, but when using them, we ask the purchaser to be responsible for the safety design of the equipment.

## 2. Specification Standards

Type		SWJ075P-12	SWJ075P-24	SWJ075P-36	SWJ075P-48	
Input Condition	Rated Input Voltage [V]	AC100 - 240 1Φ				
	Input Voltage Variation Range [V] *10	AC85 - 265 1Φ(With derating)				
	Input Current (typ) [A]*1	AC100V	1			
		AC240V	0.5			
	Rated Frequency [Hz]	50 / 60				
	Frequency Variation Range [Hz]	47 ~ 63				
	Power Factor(typ) *1	AC100V	0.99			
		AC240V	0.92			
	Efficiency(typ) [%] *1	AC100V	88			
		AC240V	90			
Inrush Current(typ) [A] *2	15 (AC100V) / 30 (AC200V)					
Leakage Current [mA] *1	0.15 (AC100V) / 0.30 (AC240V)					
Output Condition *3	Rated Output Voltage [V]	12	24	36	48	
	Output Voltage Variable Range [V] *9	10.8-13.2	21.6-26.4	32.4-39.6	43.2-52.8	
	Rated Output Current [A]	6.3	3.2	2.1	1.6	
	Peak Output Current [A] *8	8.4	4.2	2.8	2.1	
	Output Current Allowable Range [A]	0-8.4	0-4.2	0-2.8	0-2.1	
	Rated Output Power [W]	75.6	76.8	75.6	76.8	
	Peak Output Power [W]	100.8	100.8	100.8	100.8	
	Voltage Regulation [%] *5	±3				
	Ripple Noise [mVp-p] *1 *4	300	300	600	600	
	Hold-up Time(min) *1	20msec				
	Start-up time(typ) *1	500msec				
	Additional Function	Over Current Protection	More than 101% of peak output current (Auto-restart)			
Over Voltage Protection *6		More than 115% of rated voltage (output halt: latching halt)				
Environmental Condition	Operating Temperature Range [°C]	-10~+70 (With derating)				
	Storage Temperature Range [°C]	-25~+85				
	Operating humidity range	30-90% (No Condensation)				
	Storage Humidity Range	20-90% (No Condensation)				
	Cooling Condition	Natural Air				
	Vibration	Frequency [Hz]	10~55			
		Swap Time [Minutes]	3			
		Acceleration [m/s <sup>2</sup> ]	19.6 (2G)			
		Added Vibration Direction	X,Y,Z			
		Added Vibration Time	1 hour each in three directions			
	Shock[m/s <sup>2</sup> ]	196.1 (20G)				
Setting Condition	Derating depends on mounting direction					
Insulating *7	Withstand Voltage	Input-Output	AC3000V for 1minutes (Leakage Current : 10mA or less)			
		Input-FG	AC2000V for 1minutes (Leakage Current : 10mA or less)			
		Output-FG	AC500V for 1minutes (Leakage Current : 10mA or less)			
	Insulation Resistance	Input-Output	More than 100MΩ			
		Input-FG	(DC500V)			
Output-FG						
Appearance Structure Standard	Input and Output Shape	Connector				
	Externals Size(W) × (H) × (D) [mm]	132 × 28.5 × 50 (Without Chassis and Cover)				
	Weight [typ]	165g (Without Chassis and Cover) / 310g (With Chassis and Cover)				
	Safety standard	UL62368-1,c-UL(CSA62368-1),SEMKO(EN62368-1),IEC62368-1 (CB) certification, compliance with the DENAN Law (J62368-1)				
	Conduction noise	FCC ClassB compliance, EN55032 ClassB compliance, VCCI ClassB compliance, CISPR32-B compliance				
	Mains Harmonic Current	IEC61000-3-2 compliance				
	Remote ON/OFF Controls	None				
Option	Terminal Block	None				
	Chassis	Yes				
	Cover	Yes				

1. Defined by the rating input/output conditions at an environmental temperature of 25°C.
2. Excluding inrush current to noise filter. Also, when the power is turned on again, a current exceeding the indicated value may flow. (Ta=25°C)
3. The output conditions are measured at a point of 15 centimeters from the output connectors by connecting 100uF electronic capacitors and 0.1uF film capacitors.
4. Ripple noise is measured with a 100MHz oscilloscope using a 1:1 probe (chassis mounted).
5. Voltage regulation includes the result of static input variation, static load variation, warm-up drift and temperature change. (Transient overshoot, undershoot not specified)
6. Reset is re-input voltage.
7. Insulation conditions are set at room temperature and room temperature.
8. Less than the rated output current at startup. Peak output current · Peak output power is 10 seconds or less, Duty: 35% or less. The peak output current and peak output power must not be exceeded.
9. When adjusting the output voltage, do not exceed the output voltage variable range, rated output current, rated output power, peak output current, peak output power.
10. AC90V and below requires output derating.

## 2. Specification Standards

Type		SWJ150P-12	SWJ150P-24	SWJ150P-36	SWJ150P-48	
Input Condition	Rated Input Voltage [V]	AC100 - 240 1Φ				
	Input Voltage Variation Range [V] *10	AC85 - 265 1Φ(With derating)				
	Input Current (typ) [A]*1	AC100V	1.5	1.7		
		AC240V	0.6	0.7		
	Rated Frequency [Hz]	50 / 60				
	Frequency Variation Range [Hz]	47 ~ 63				
	Power Factor(typ) *1	AC100V	0.99			
		AC240V	0.95			
	Efficiency(typ) [%] *1	AC100V	89	90		
		AC240V	93	94		
Inrush Current(typ) [A] *2	15 (AC100V) / 30 (AC200V)					
Leakage Current [mA] *1	0.1/0.25max(AC100V/AC240V 60Hz) 0.05/0.15typ(AC100V/AC240V 60Hz)					
Output Condition *3	Rated Output Voltage [V]	12	24	36	48	
	Output Voltage Variable Range [V] *9	11.4~13.2	22.8~26.4	34.2~39.6	45.6~52.8	
	Rated Output Current [A]	11	6.3	4.2	3.2	
	Peak Output Current [A] *8	16.7	8.6	5.6	4.2	
	Output Current Allowable Range [A]	0~16.7	0~8.6	0~5.6	0~4.2	
	Rated Output Power [W]	132.0	151.2	151.2	153.6	
	Peak Output Power [W]	200.4	206.4	201.6	201.6	
	Voltage Regulation [%] *5	±3				
	Ripple Noise [mVp-p] *1 *4	150	150	300	300	
	Hold-up Time(min) *1	20msec				
	Start-up time(typ) *1	300msec				
Additional Function	Over Current Protection	More than 101% of peak output current (Auto-restart)				
	Over Voltage Protection *6	More than 115% of rated voltage (output halt: latching halt)				
Environmental Condition	Operating Temperature Range [°C]	-10~+70 (With derating)				
	Storage Temperature Range [°C]	-25~+85				
	Operating humidity range	30~90% (No Condensation)				
	Storage Humidity Range	20~90% (No Condensation)				
	Cooling Condition	Natural Air				
	Vibration	Frequency [Hz]	10~55			
		Swap Time [Minutes]	3			
		Acceleration [m/s <sup>2</sup> ]	19.6 (2G)			
		Added Vibration Direction	X,Y,Z			
		Added Vibration Time	1 hour each in three directions			
Shock[m/s <sup>2</sup> ]	196.1 (20G)					
Setting Condition	Derating depends on mounting direction					
Insulating *7	Withstand Voltage	Input-Output	AC3000V for 1minutes (Leakage Current : 10mA or less)			
		Input-FG	AC2000V for 1minutes (Leakage Current : 10mA or less)			
		Output-FG	AC500V for 1minutes (Leakage Current : 10mA or less)			
	Insulation Resistance	Input-Output	More than 100MΩ			
		Input-FG	(DC500V)			
Output-FG						
Appearance Structure Standard	Input and Output Shape	Connector				
	Externals Size(W) × (H) × (D) [mm]	155 × 33.5 × 62 (Without Chassis and Cover)				
	Weight [typ]	220g (Without Chassis and Cover) / 420g (With Chassis and Cover)				
	Safety standard	UL62368-1,c-UL(CSA62368-1),SEMKO(EN62368-1),IEC62368-1(CB),IEC60950-1(CB) certification, compliance with the DENAN Law (J62368-1)				
	Conduction noise	FCC ClassB compliance, EN55032 ClassB compliance, VCCI ClassB compliance, CISPR32-B compliance				
	Mains Harmonic Current	IEC61000-3-2 compliance				
Option	Remote ON/OFF Controls	Yes				
	Terminal Block	None				
	Chassis	Yes				
	Cover	Yes				

1. Defined by the rating input/output conditions at an environmental temperature of 25°C.
2. Excluding inrush current to noise filter.Also, when the power is turned on again, a current exceeding the indicated value may flow.(Ta=25°C)
3. The output conditions are measured at a point of 15 centimeters from the output connectors by connecting 100uF electronic capacitors and 0.1uF film capacitors.
4. Ripple noise is measured with a 100MHz oscilloscope using a 1:1 probe (chassis mounted).
5. Voltage regulation includes the result of static input variation, static load variation,warm-up drift and temperature change. (Transient overshoot, undershoot not specified)
6. Reset is re-input voltage.
7. Insulation conditions are set at room temperature and room temperature.
8. Less than the rated output current at startup.Peak output current · Peak output power is 10 seconds or less, Duty: 35% or less. The peak output current and peak output power must not be exceeded.
9. When adjusting the output voltage, do not exceed the output voltage variable range,rated output current, rated output power, peak output current, peak output power.
10. AC90V and below requires output delirating.

## 2. Specification Standards

Type		SWJ240P-12	SWJ240P-24	SWJ240P-36	SWJ240P-48	
Input Condition	Rated Input Voltage [V]	AC100 - 240 1Φ				
	Input Voltage Variation Range [V] *10	AC85 - 265 1Φ(With derating)				
	Input Current (typ) [A]*1	AC100V	2.1		2.8	
		AC240V	1.0		1.2	
	Rated Frequency [Hz]	50 / 60				
	Frequency Variation Range [Hz]	47 ~ 63				
	Power Factor(typ) *1	AC100V	0.99			
		AC240V	0.95			
	Efficiency(typ) [%] *1	AC100V	90		91	
		AC240V	92		94	
Inrush Current(typ) [A] *2	15 (AC100V) / 30 (AC200V)					
Leakage Current [mA] *1	0.15/0.25max(AC100V/AC240V 60Hz) 0.08/0.19typ(AC100V/AC240V 60Hz)					
Output Condition *3	Rated Output Voltage [V]	12	24	36	48	
	Output Voltage Variable Range [V] *9	11.4~13.2	22.8~26.4	34.2~39.6	45.6~52.8	
	Rated Output Current [A]	15	10	6.7	5	
	Peak Output Current [A] *8	25.0	12.5	8.4	6.3	
	Output Current Allowable Range [A]	0-25.0	0-12.5	0-8.4	0-6.3	
	Rated Output Power [W]	180	240	241.2	240	
	Peak Output Power [W]	300	300	302.4	302.4	
	Voltage Regulation [%] *5	±3				
	Ripple Noise [mVp-p] *1 *4	200	150	170	250	
	Hold-up Time(min) *1	20msec				
Start-up time(typ) *1	300msec					
Additional Function	Over Current Protection	More than 101% of peak output current (Auto-restart)				
	Over Voltage Protection *6	More than 115% of rated voltage (output halt: latching halt)				
Environmental Condition	Operating Temperature Range [°C]	-10~+70 (With derating)				
	Storage Temperature Range [°C]	-25~+85				
	Operating humidity range	30-90% (No Condensation)				
	Storage Humidity Range	20-90% (No Condensation)				
	Cooling Condition	Natural Air				
	Vibration	Frequency [Hz]	10~55			
		Swap Time [Minutes]	3			
		Acceleration [m/s <sup>2</sup> ]	19.6 (2G)			
		Added Vibration Direction	X,Y,Z			
		Added Vibration Time	1 hour each in three directions			
Shock[m/s <sup>2</sup> ]	196.1 (20G)					
Setting Condition	Derating depends on mounting direction					
Insulating *7	Withstand Voltage	Input-Output	AC3000V for 1minutes (Leakage Current : 10mA or less)			
		Input-FG	AC2000V for 1minutes (Leakage Current : 10mA or less)			
		Output-FG	AC500V for 1minutes (Leakage Current : 10mA or less)			
	Insulation Resistance	Input-Output	More than 100MΩ			
		Input-FG	(DC500V)			
Output-FG						
Appearance Structure Standard	Input and Output Shape	Connector				
	Externals Size(W) × (H) × (D) [mm]	160 × 37 × 75 (Without Chassis and Cover)				
	Weight [typ]	350g (Without Chassis and Cover) / 600g (With Chassis and Cover)				
	Safety standard	UL62368-1,c-UL(CSA62368-1),SEMKO(EN62368-1),IEC62368-1(CB),IEC60950-1(CB) certification, compliance with the DENAN Law (J62368-1)				
	Conduction noise	FCC ClassB compliance, EN55032 ClassB compliance, VCCI ClassB compliance, CISPR32-B compliance				
	Mains Harmonic Current	IEC61000-3-2 compliance				
Option	Remote ON/OFF Controls	Yes				
	Terminal Block	None				
	Chassis	Yes				
	Cover	Yes				

1. Defined by the rating input/output conditions at an environmental temperature of 25°C.
2. Excluding inrush current to noise filter. Also, when the power is turned on again, a current exceeding the indicated value may flow. (Ta=25°C)
3. The output conditions are measured at a point of 15 centimeters from the output connectors by connecting 100uF electronic capacitors and 0.1uF film capacitors.
4. Ripple noise is measured with a 100MHz oscilloscope using a 1:1 probe (chassis mounted).
5. Voltage regulation includes the result of static input variation, static load variation, warm-up drift and temperature change. (Transient overshoot, undershoot not specified)
6. Reset is re-input voltage.
7. Insulation conditions are set at room temperature and room temperature.
8. Less than the rated output current at startup. Peak output current · Peak output power is 10 seconds or less, Duty: 35% or less. The peak output current and peak output power must not be exceeded.
9. When adjusting the output voltage, do not exceed the output voltage variable range, rated output current, rated output power, peak output current, peak output power.
10. AC90V and below requires output delirating.



## 2. Specification Standards

Type		SWJ300P-24	SWJ300P-36	SWJ300P-48	
Input Condition	Rated Input Voltage [V]	AC100 - 240 1Φ			
	Input Voltage Variation Range [V] *10	AC85 - 265 1Φ(With derating)			
	Input Current (typ) [A]*1	AC100V	3.5		
		AC240V	1.5		
	Rated Frequency [Hz]	50 / 60			
	Frequency Variation Range [Hz]	47 ~ 63			
	Power Factor(typ) *1	AC100V	0.98		
		AC240V	0.94		
	Efficiency(typ) [%] *1	AC100V	91		
		AC240V	94		
Inrush Current(typ) [A] *2	15 (AC100V) / 30 (AC200V)				
Leakage Current [mA] *1	0.1/0.2max(AC100V/AC240V 60Hz) 0.05/0.13typ(AC100V/AC240V 60Hz)				
Output Condition *3	Rated Output Voltage [V]	24	36	48	
	Output Voltage Variable Range [V] *9	21.6-26.4	32.4-39.6	43.2-52.8	
	Rated Output Current [A]	12.6	8.4	6.3	
	Peak Output Current [A] *8	20.2	13.4	10.1	
	Output Current Allowable Range [A]	0 ~ 20.2	0 ~ 13.4	0 ~ 10.1	
	Rated Output Power [W]	302.4	302.4	302.4	
	Peak Output Power [W]	484.8	482.4	484.8	
	Voltage Regulation [%] *5	±3			
	Ripple Noise [mVp-p] *1 *4	260	330	370	
	Hold-up Time(min) *1	20msec			
Start-up time(typ) *1	250msec				
Additional Function	Over Current Protection	More than 101% of peak output current (Auto-restart)			
	Over Voltage Protection *6	More than 115% of rated voltage (output halt: latching halt)			
Environmental Condition	Operating Temperature Range [°C]	-10~+70 (With derating)			
	Storage Temperature Range [°C]	-25~+85			
	Operating humidity range	30-90% (No Condensation)			
	Storage Humidity Range	20-90% (No Condensation)			
	Cooling Condition	Natural Air			
	Vibration	Frequency [Hz]	10~55		
		Swap Time [Minutes]	3		
		Acceleration [m/s <sup>2</sup> ]	19.6 (2G)		
		Added Vibration Direction	X,Y,Z		
		Added Vibration Time	1 hour each in three directions		
Shock[m/s <sup>2</sup> ]	196.1 (20G)				
Setting Condition	Derating depends on mounting direction				
Insulating *7	Withstand Voltage	Input-Output	AC3000V for 1minutes (Leakage Current : 10mA or less)		
		Input-FG	AC2000V for 1minutes (Leakage Current : 10mA or less)		
		Output-FG	AC500V for 1minutes (Leakage Current : 10mA or less)		
	Insulation Resistance	Input-Output	More than 100MΩ		
		Input-FG	(DC500V)		
		Output-FG			
Appearance Structure Standard	Input and Output Shape	Connector			
	Externals Size(W) × (H) × (D) [mm]	180 × 42 × 84 (Without Chassis and Cover)			
	Weight [typ]	550g (Without Chassis and Cover) / 850g (With Chassis and Cover)			
	Safety standard	UL62368-1,c-UL(CSA62368-1),SEMKO(EN62368-1),IEC62368-1(CB),IEC60950-1(CB) certification, compliance with the DENAN Law (J62368-1)			
	Conduction noise	FCC ClassB compliance, EN55032 ClassB compliance, VCCI ClassB compliance, CISPR32-B compliance			
Mains Harmonic Current	IEC61000-3-2 compliance				
Option	Remote ON/OFF Controls	Yes			
	Terminal Block	None			
	Chassis	Yes			
	Cover	Yes			

1. Defined by the rating input/output conditions at an environmental temperature of 25°C.
2. Excluding inrush current to noise filter. Also, when the power is turned on again, a current exceeding the indicated value may flow. (Ta=25°C)
3. The output conditions are measured at a point of 15 centimeters from the output connectors by connecting 100uF electronic capacitors and 0.1uF film capacitors.
4. Ripple noise is measured with a 100MHz oscilloscope using a 1:1 probe (chassis mounted).
5. Voltage regulation includes the result of static input variation, static load variation, warm-up drift and temperature change. (Transient overshoot, undershoot not specified)
6. Reset is re-input voltage.
7. Insulation conditions are set at room temperature and room temperature.
8. Less than the rated output current at startup. Peak output current · Peak output power is 10 seconds or less, Duty: 35% or less. The peak output current and peak output power must not be exceeded.
9. When adjusting the output voltage, do not exceed the output voltage variable range, rated output current, rated output power, peak output current, peak output power.
10. AC90V and below requires output delimiting.

## 2. Specification Standards


Type		SWJ330X-24	SWJ330X-36	SWJ330X-48	
Input Condition	Rated Input Voltage [V]	AC100 - 240 1Φ			
	Input Voltage Variation Range [V] *10	AC85 - 265 1Φ(With derating)			
	Input Current (typ) [A]*1	AC100V	3.9		
		AC240V	1.7		
	Rated Frequency [Hz]	50 / 60			
	Frequency Variation Range [Hz]	47 ~ 63			
	Power Factor(typ) *1	AC100V	0.98		
		AC240V	0.94		
	Efficiency(typ) [%] *1	AC100V	91		
		AC240V	94		
Inrush Current(typ) [A] *2	15 (AC100V) / 30 (AC200V)				
Leakage Current [mA] *1	0.1/0.2max(AC100V/AC240V 60Hz) 0.05/0.13typ(AC100V/AC240V 60Hz)				
Output Condition *3	Rated Output Voltage [V]	24	36	48	
	Output Voltage Variable Range [V] *9	21.6-26.4	32.4-39.6	43.2-52.8	
	Rated Output Current [A]	13.8	9.2	6.9	
	Peak Output Current [A] *8	25.2/27.6 (100V/200V)	16.8/18.4 (100V/200V)	12.6/13.8 (100V/200V)	
	Output Current Allowable Range [A]	0~25.2/0~27.6 (100V/200V)	0~16.8/0~18.4 (100V/200V)	0~12.6/0~13.8 (100V/200V)	
	Rated Output Power [W]	331.2	331.2	331.2	
	Peak Output Power [W]	604.8/662.4 (100V/200V)	604.8/662.4 (100V/200V)	604.8/662.4 (100V/200V)	
	Voltage Regulation [%] *5	±3			
	Ripple Noise [mVp-p] *1 *4	260	330	370	
	Hold-up Time(min) *1	20msec			
	Start-up time(typ) *1	250msec			
	Additional Function	Over Current Protection	More than 101% of peak output current (Auto-restart)		
Over Voltage Protection *6		More than 115% of rated voltage (output halt: latching halt)			
Environmental Condition	Operating Temperature Range [°C]	-10~+70 (With derating)			
	Storage Temperature Range [°C]	-25~+85			
	Operating humidity range	30-90% (No Condensation)			
	Storage Humidity Range	20-90% (No Condensation)			
	Cooling Condition	Natural Air			
	Vibration	Frequency [Hz]	10~55		
		Swap Time [Minutes]	3		
		Acceleration [m/s <sup>2</sup> ]	19.6 (2G)		
		Added Vibration Direction	X,Y,Z		
		Added Vibration Time	1 hour each in three directions		
Shock[m/s <sup>2</sup> ]	196.1 (20G)				
Setting Condition	Derating depends on mounting direction				
Insulating *7	Withstand Voltage	Input-Output	AC3000V for 1minutes (Leakage Current : 10mA or less)		
		Input-FG	AC2000V for 1minutes (Leakage Current : 10mA or less)		
		Output-FG	AC500V for 1minutes (Leakage Current : 10mA or less)		
	Insulation Resistance	Input-Output	More than 100MΩ		
		Input-FG	(DC500V)		
Output-FG					
Appearance Structure Standard	Input and Output Shape	Connector			
	Externals Size(W) × (H) × (D) [mm]	180 × 42 × 84 (Without Chassis and Cover)			
	Weight [typ]	550g (Without Chassis and Cover) / 850g (With Chassis and Cover)			
	Safety standard	UL62368-1,c-UL(CSA62368-1),SEMKO(EN62368-1),IEC62368-1(CB),IEC60950-1(CB) certification, compliance with the DENAN Law(J62368-1)			
	Conduction noise	FCC ClassB compliance, EN55032 ClassB compliance, VCCI ClassB compliance, CISPR32-B compliance			
	Mains Harmonic Current	IEC61000-3-2 compliance			
Option	Remote ON/OFF Controls	Yes			
	Terminal Block	None			
	Chassis	Yes			
	Cover	Yes			

1. Defined by the rating input/output conditions at an environmental temperature of 25°C.
2. Excluding inrush current to noise filter. Also, when the power is turned on again, a current exceeding the indicated value may flow. (Ta=25°C)
3. The output conditions are measured at a point of 15 centimeters from the output connectors by connecting 100uF electronic capacitors and 0.1uF film capacitors.
4. Ripple noise is measured with a 100MHz oscilloscope using a 1:1 probe (chassis mounted).
5. Voltage regulation includes the result of static input variation, static load variation, warm-up drift and temperature change. (Transient overshoot, undershoot not specified)
6. Reset is re-input voltage.
7. Insulation conditions are set at room temperature and room temperature.
8. Less than the rated output current at startup. Peak output current · Peak output power is 10 seconds or less, Duty: 35% or less. The peak output current and peak output power must not be exceeded.
9. When adjusting the output voltage, do not exceed the output voltage variable range, rated output current, rated output power, peak output current, peak output power.
10. AC90V and below requires output delirating.
11. (100V / 200V) is (85~186Vac / 187~265Vac).


### 3. Dimensional Outline Drawing

(Unit: mm)  
(The error without instruction is  $\pm 1.0\text{mm}$ )

#### ■ SWJ075P-\*\*

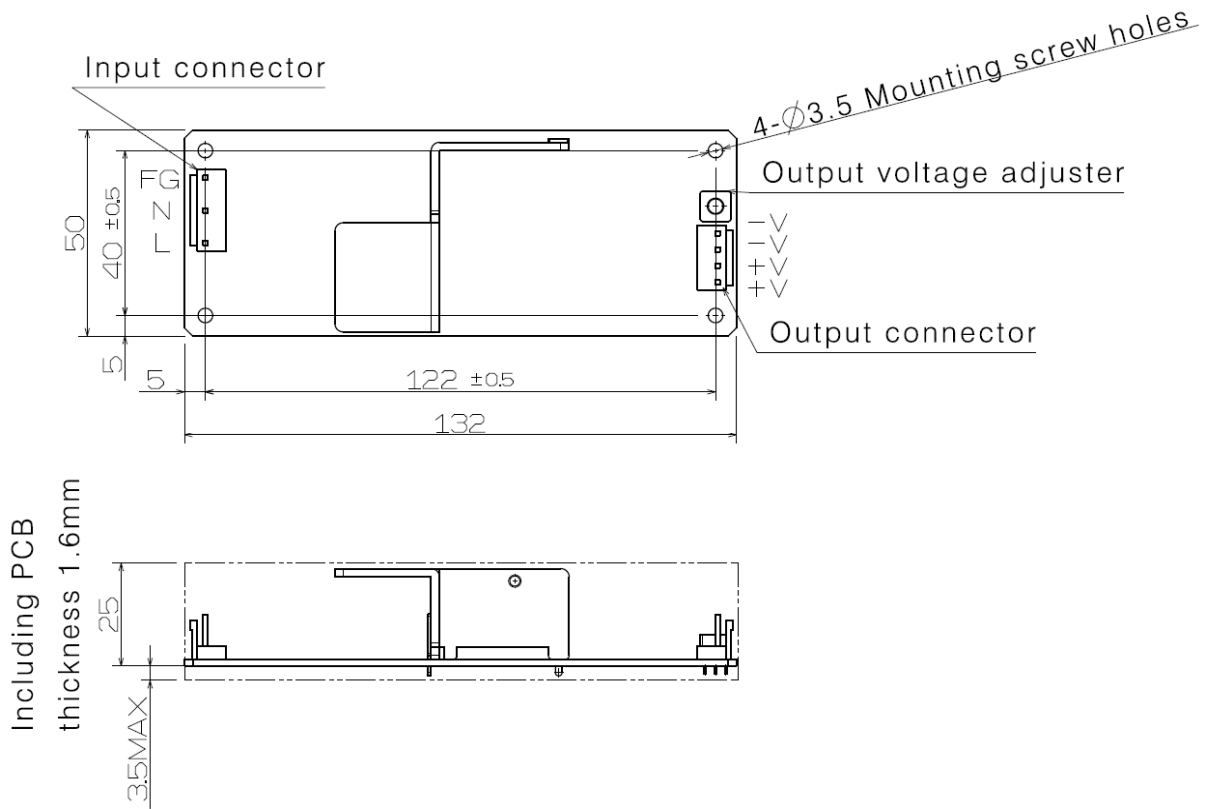


#### ■ SWJ075P-\*\*-L

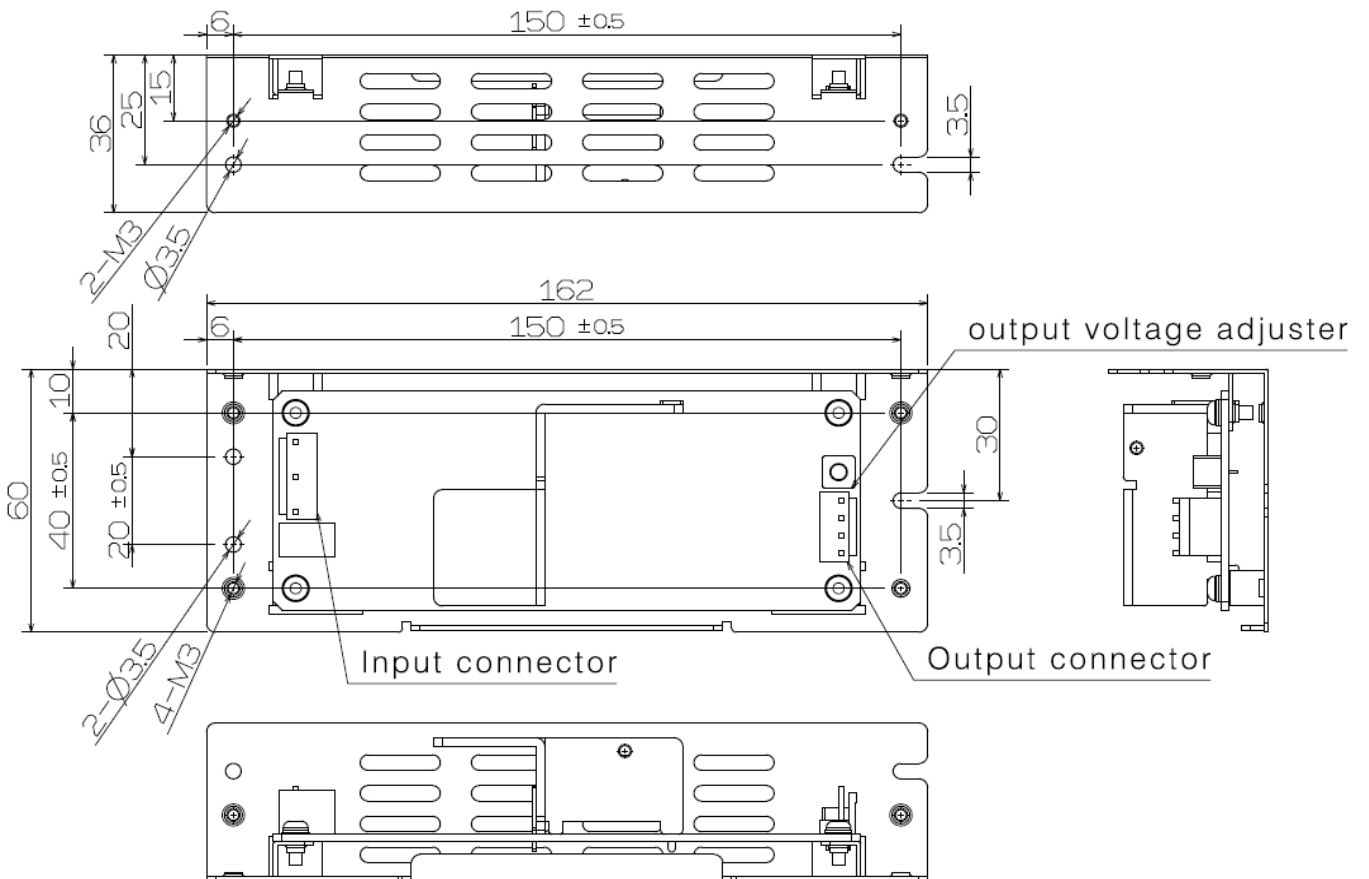

### 3. Dimensional Outline Drawing

(Unit: mm)  
(The error without instruction is  $\pm 1.0\text{mm}$ )


#### ■ SWJ075P-\*\*-LC

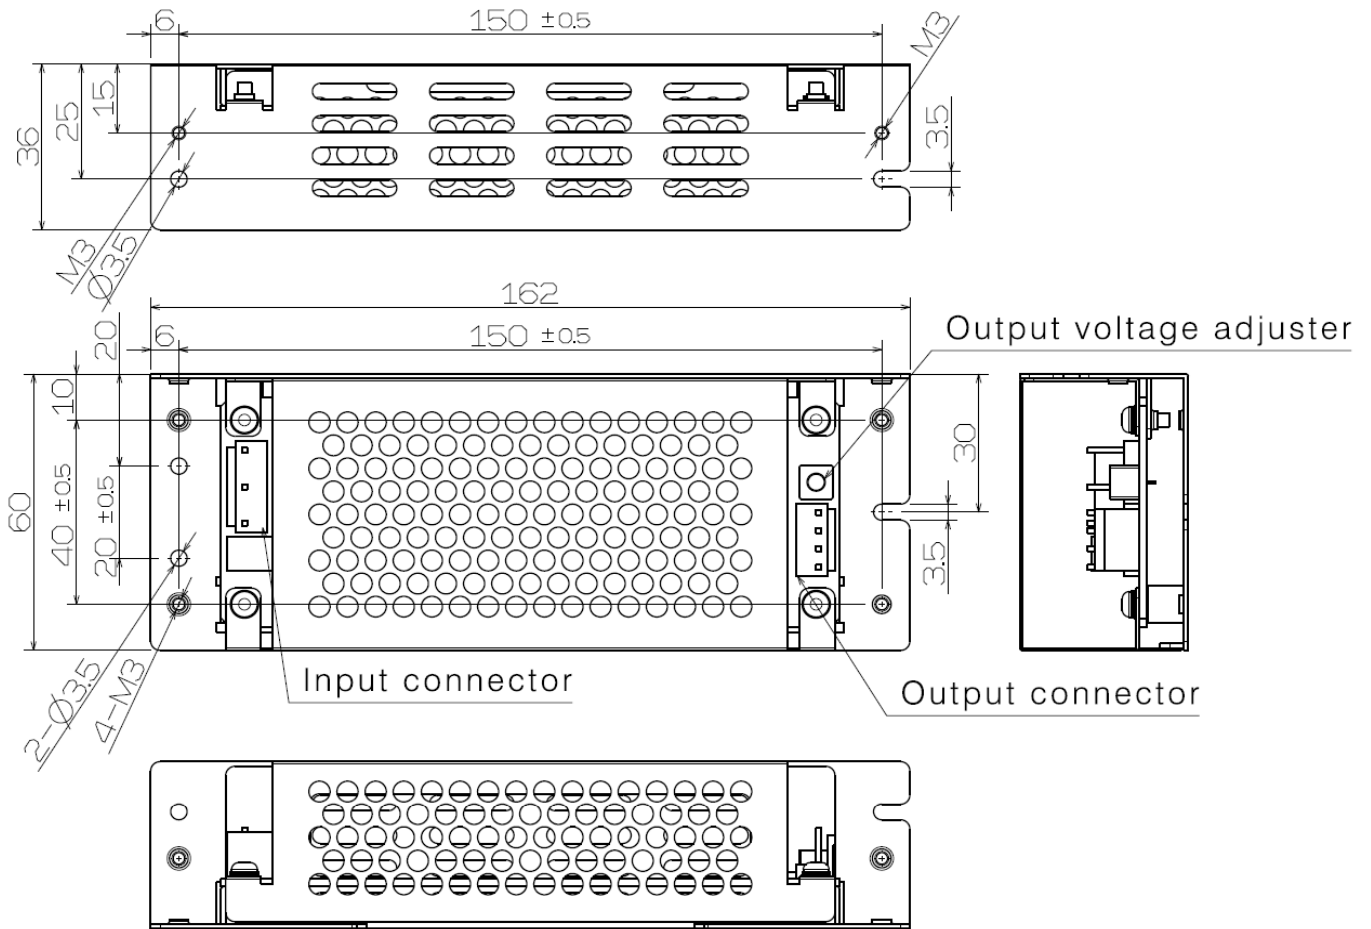


# 3. Dimensional Outline Drawing

(Unit: mm)  
(The error without instruction is  $\pm 1.0\text{mm}$ )

## SWJ150P-\*\*

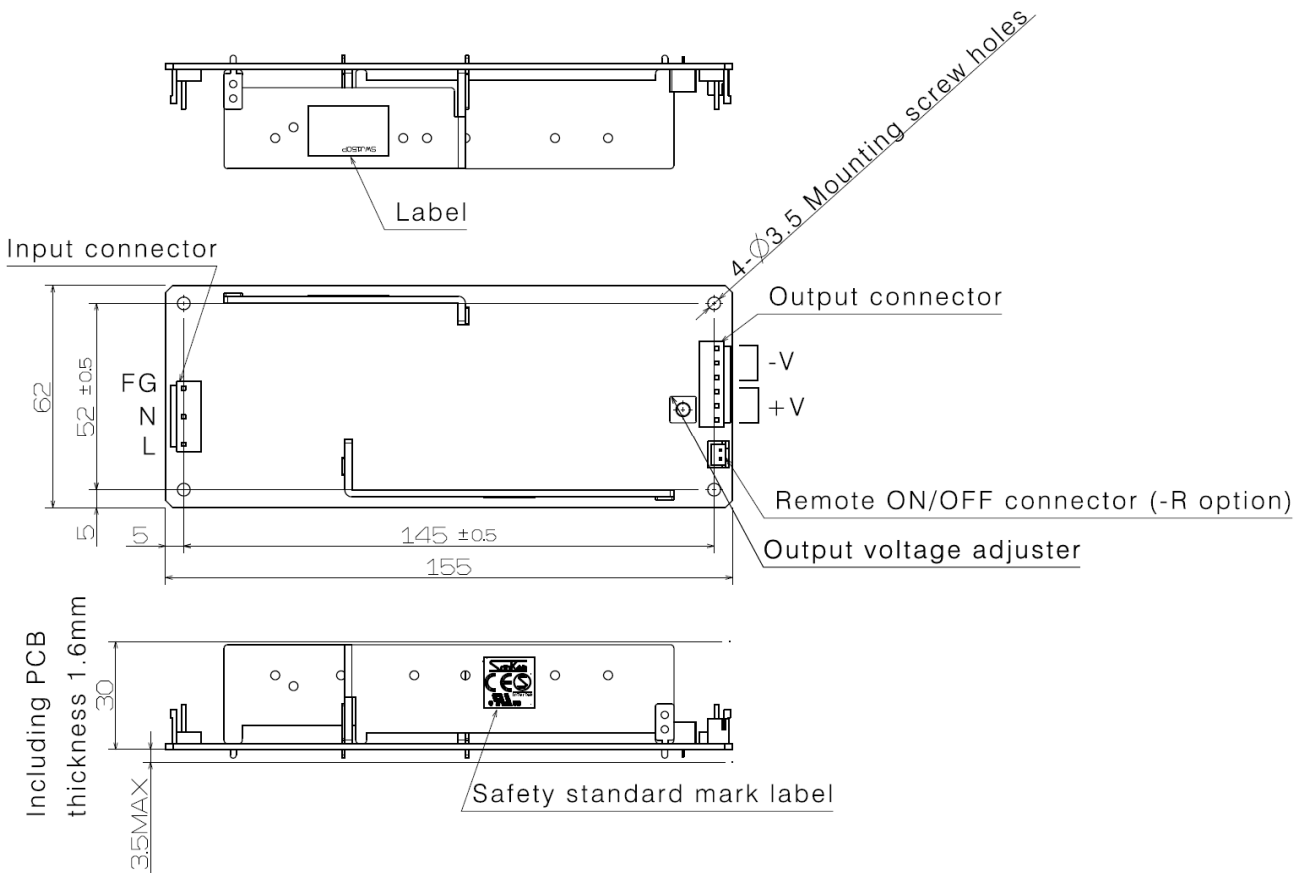


## SWJ150P-\*\*-L

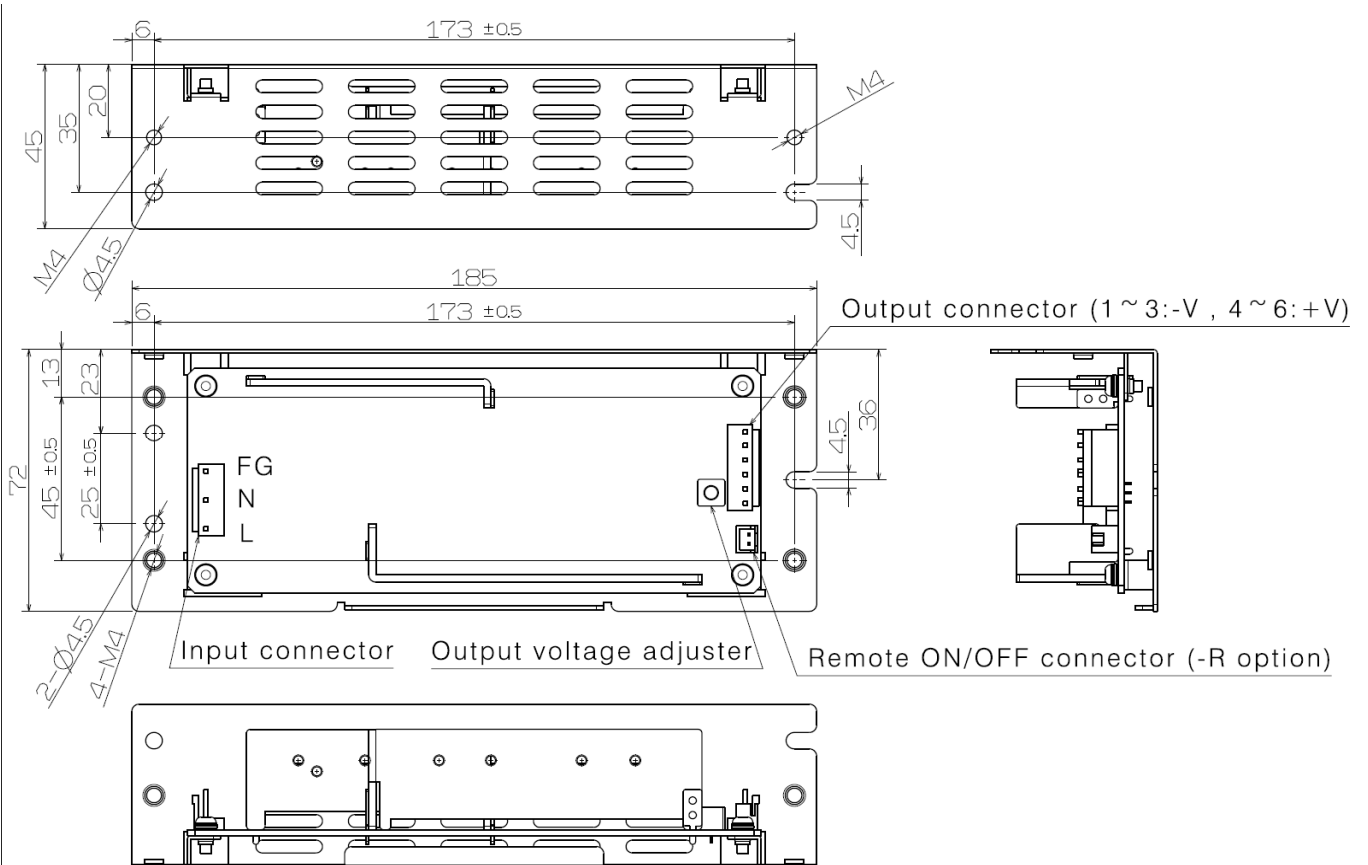

### 3. Dimensional Outline Drawing

(Unit: mm)  
(The error without instruction is  $\pm 1.0\text{mm}$ )


#### ■ SWJ150P-\*\*-LC

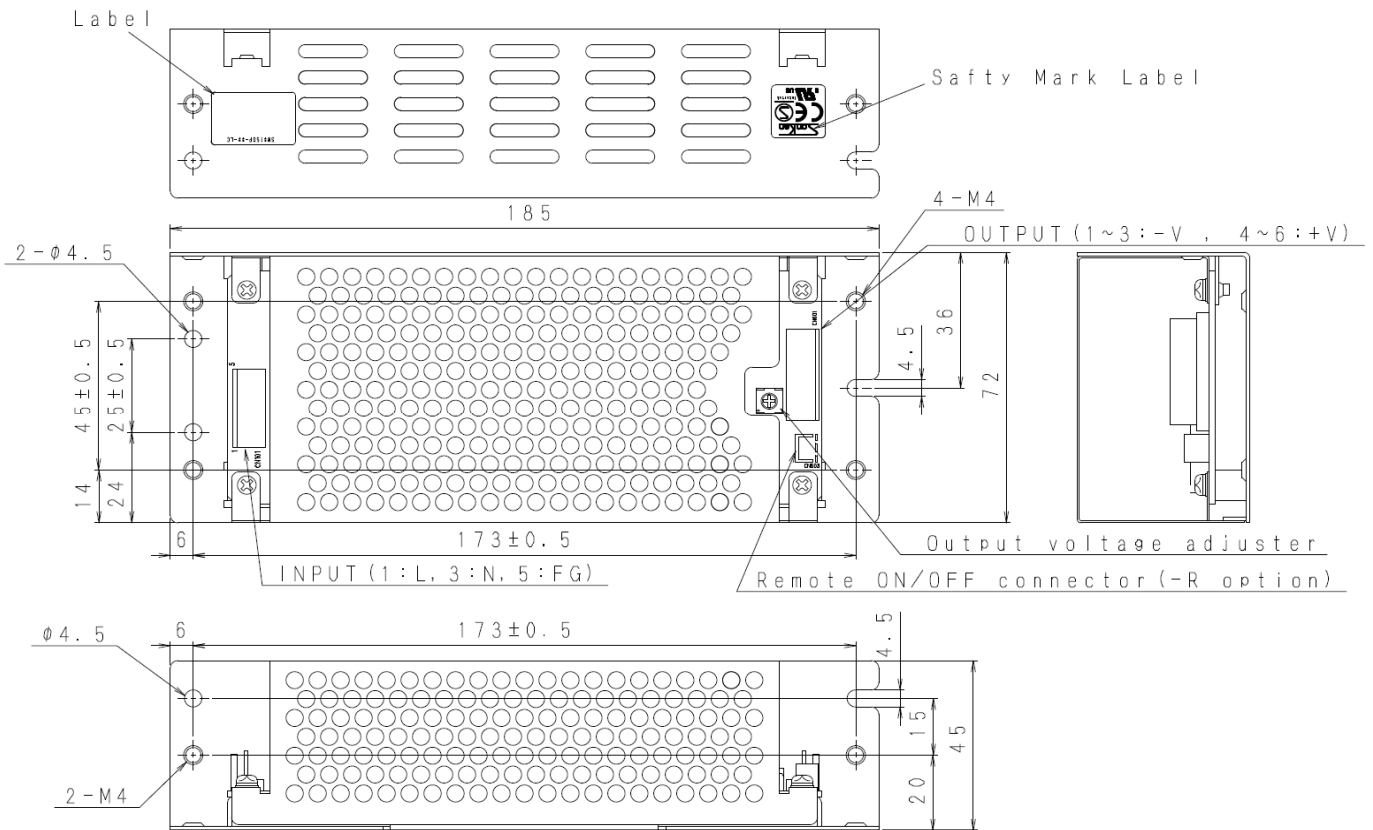


### 3. Dimensional Outline Drawing

(Unit: mm)  
 (The error without instruction is  $\pm 1.0\text{mm}$ )

#### ■ SWJ240P-\*\*

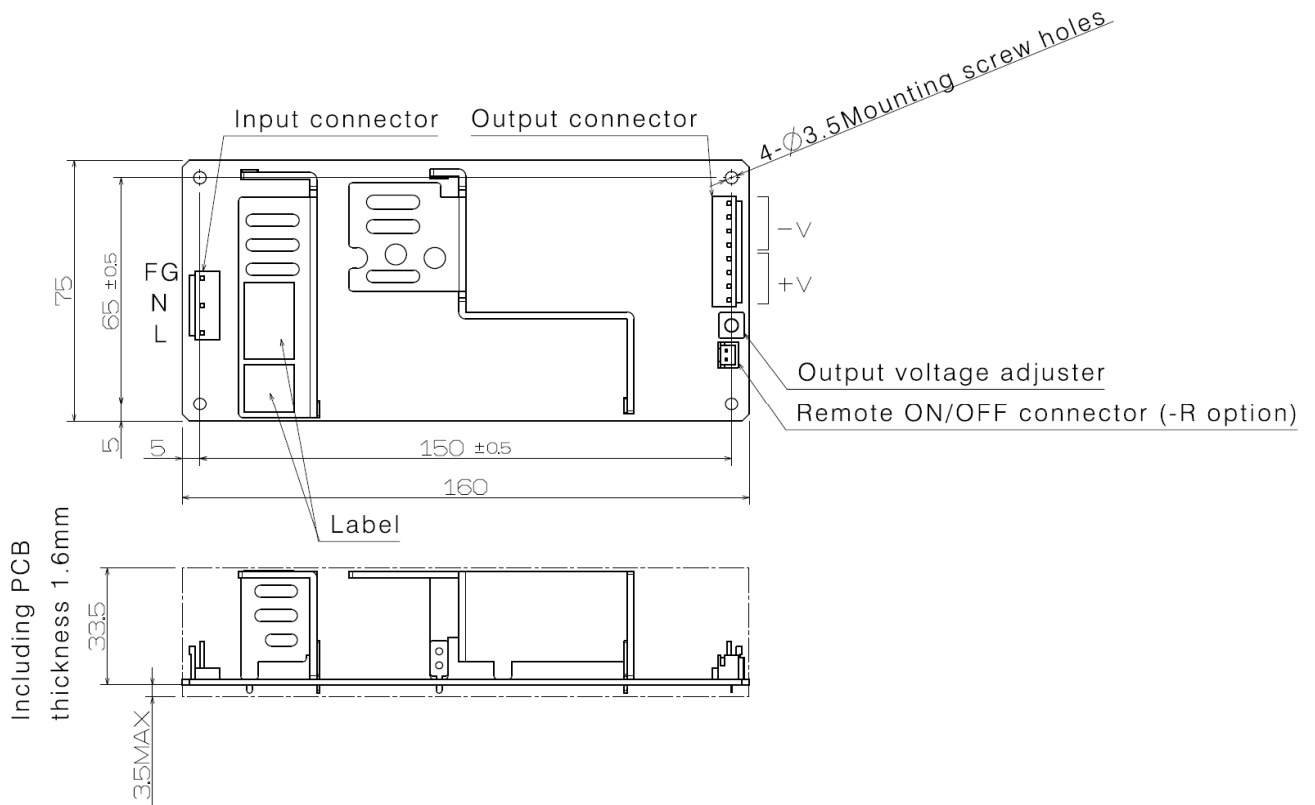


#### ■ SWJ240P-\*\*-L

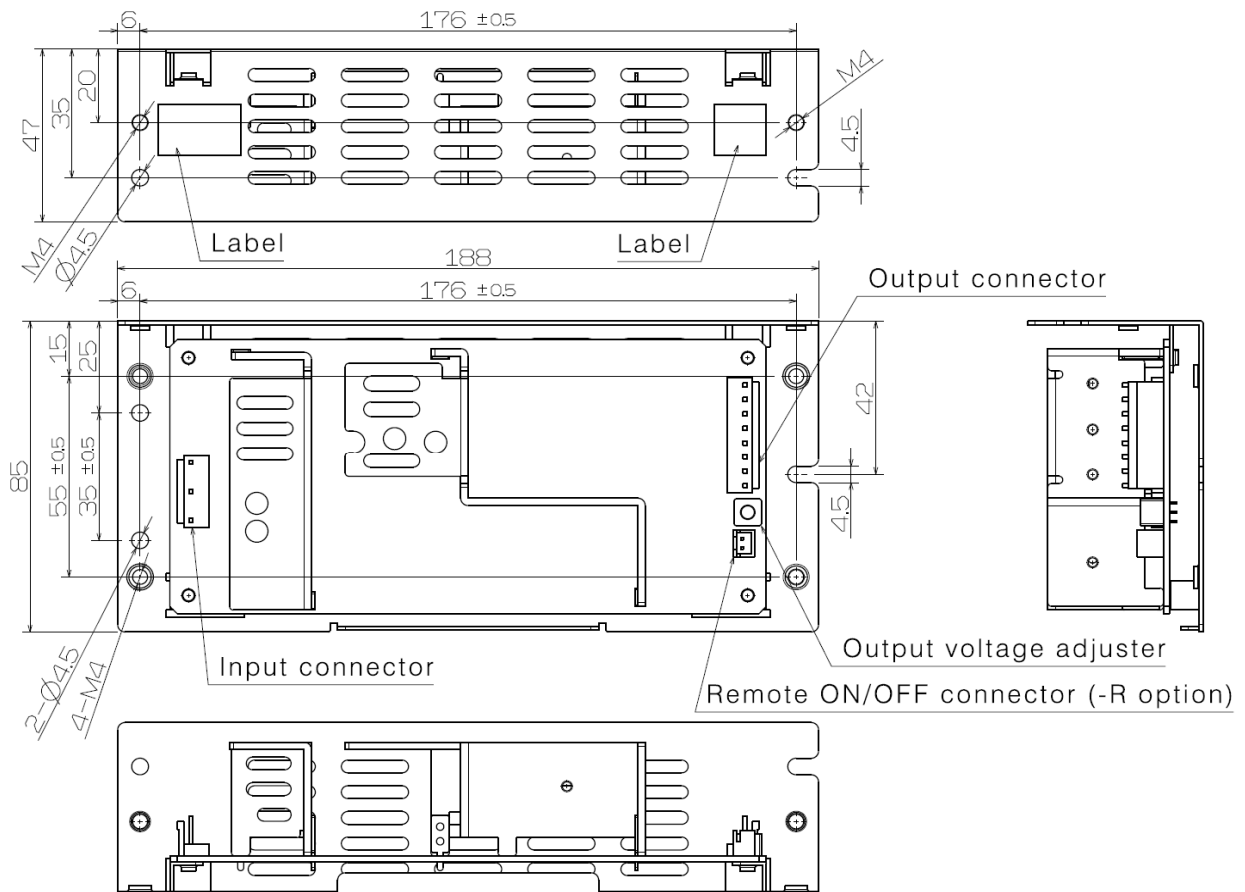

# 3. Dimensional Outline Drawing

(Unit: mm)  
(The error without instruction is  $\pm 1.0\text{mm}$ )

## SWJ240P-\*\*-LC

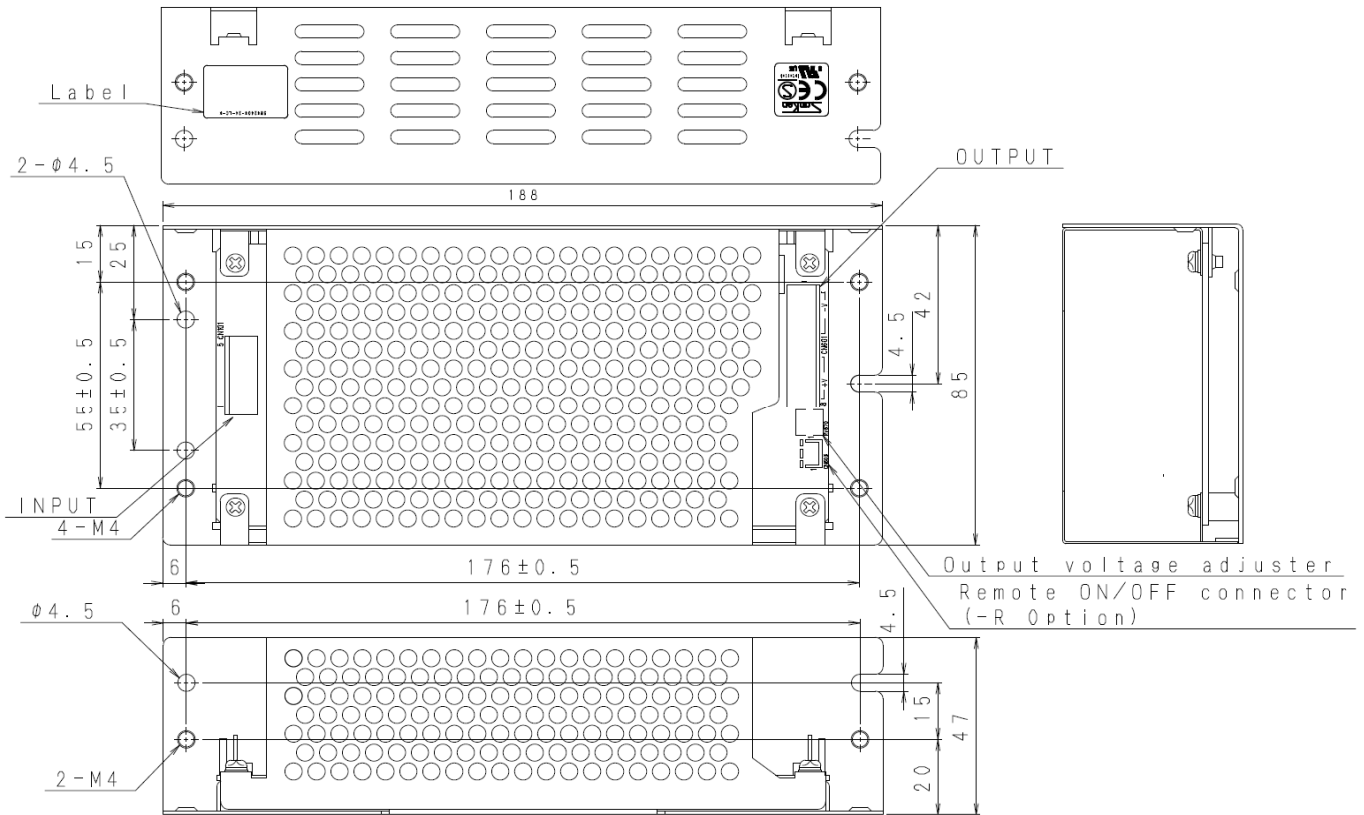





# 3. Dimensional Outline Drawing

(Unit: mm)  
(The error without instruction is  $\pm 1.0\text{mm}$ )

## SWJ300P-\*\*-L / SWJ330X-\*\*-L

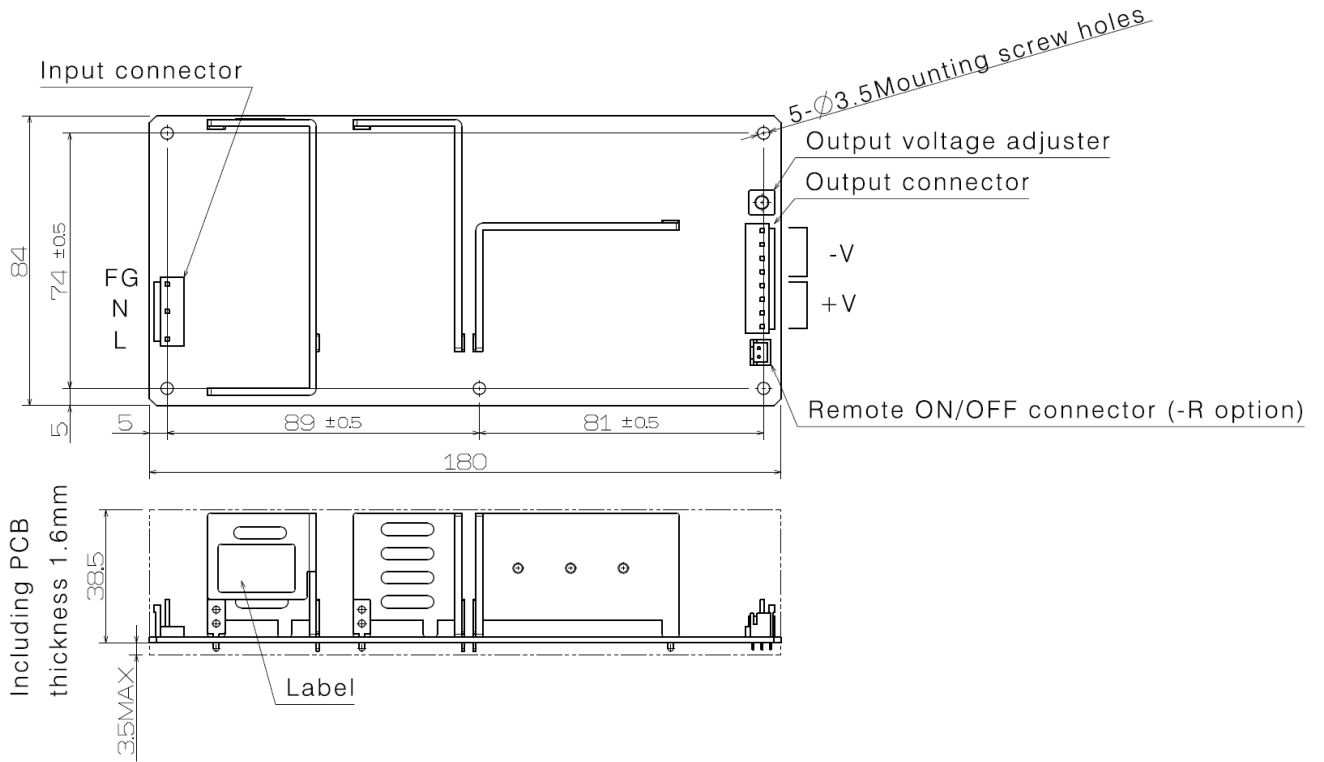


## SWJ300P-\*\*-L / SWJ330X-\*\*-L

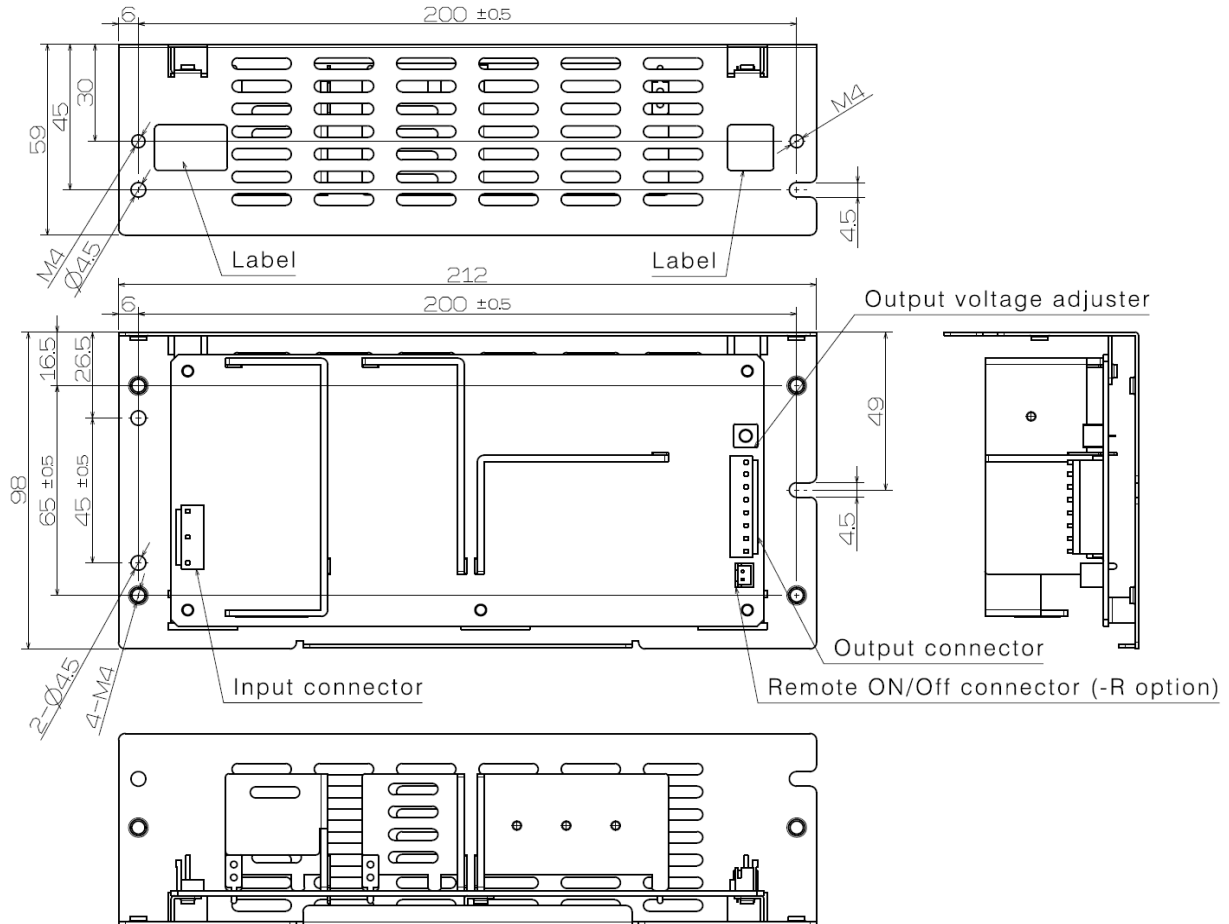


# 3. Dimensional Outline Drawing

(Unit: mm)  
 (The error without instruction is  $\pm 1.0\text{mm}$ )

## ■ SWJ300P-\*\*-LC / SWJ330X-\*\*-LC

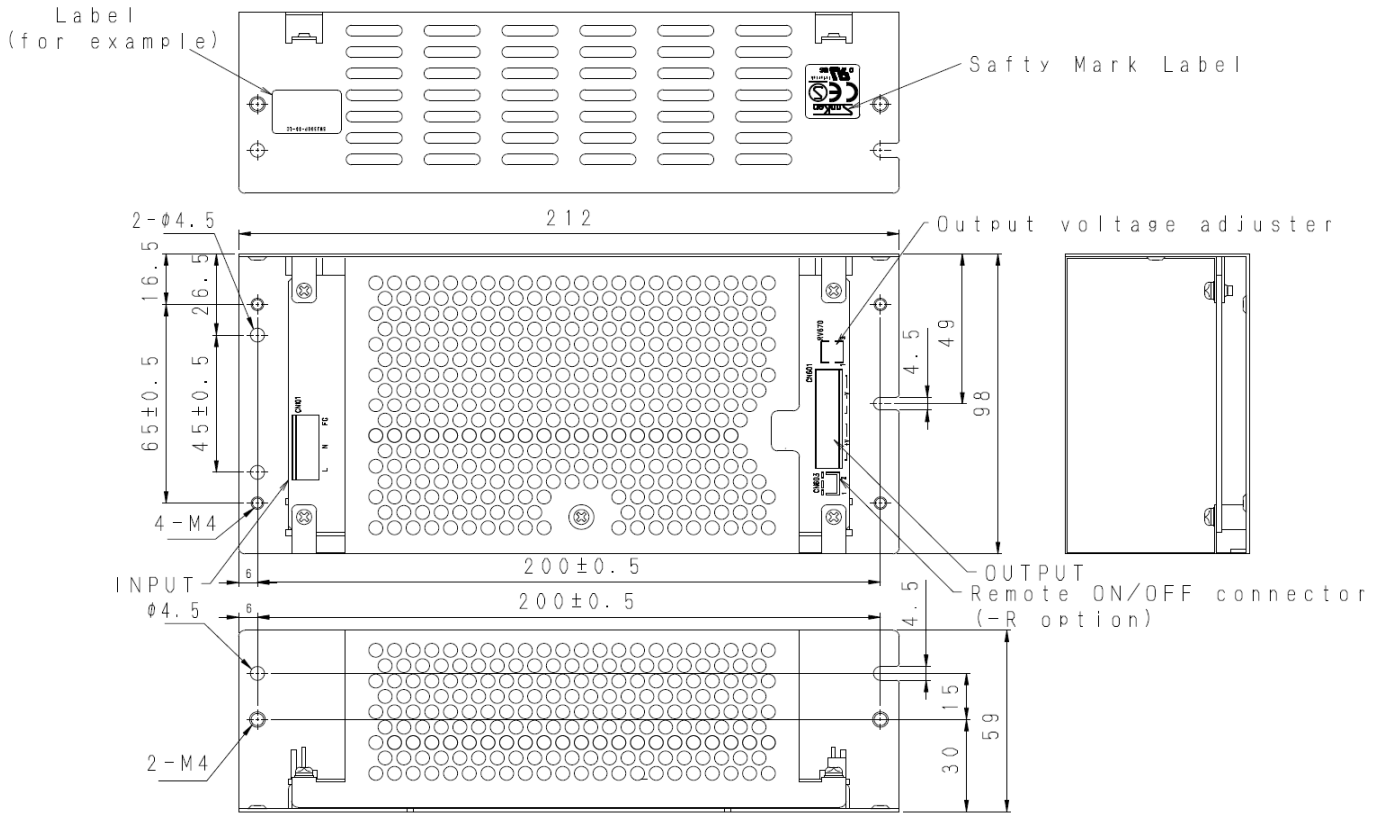

## 4. Model Name Generic Examples, Options

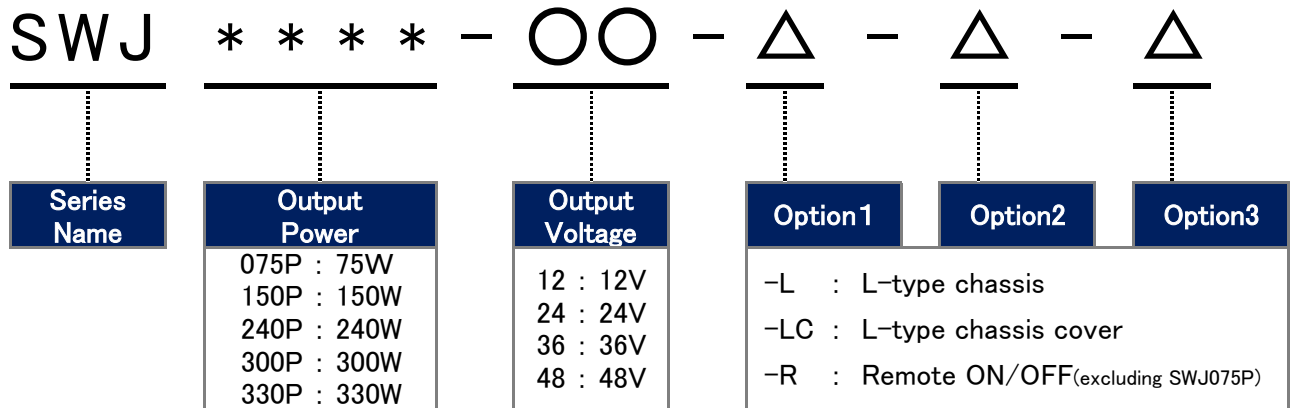

※Please refer to the table below for the mix of options.

### Optional Equipment

Output Power	Output Voltage	Type	Standard Products	L-type Chassis	L-type Chassis Cover	Remote ON/OFF
75W	12V	SWJ****-○○	●			
	24V	SWJ****-○○-L		●		
	36V	SWJ****-○○-LC			●	
	48V	SWJ****-○○-LC				
150W 240W	12V	SWJ****-○○	●			
	24V	SWJ****-○○-L		●		
		SWJ****-○○-LC			●	
	36V	SWJ****-○○-R				●
		SWJ****-○○-L-R			●	●
	48V	SWJ****-○○-LC-R			●	●
300W 330W	24V	SWJ****-○○	●			
		SWJ****-○○-L		●		
		SWJ****-○○-LC			●	
	36V	SWJ****-○○-R				●
		SWJ****-○○-L-R			●	●
	48V	SWJ****-○○-LC-R			●	●

## 5. Terminal connection

Input and Output Connectors

※Connector manufacturer : Japan Pressure Terminals (JST)

### SWJ075P-\*\*

Terminal Name	Pin Number	Connector Type	Compliant Connectors	Conforming Contact	Remarks
CN 1	1: AC(L) 2: - 3: AC(N) 4: - 5: FG	B3P5-VH	VHR-5N	SVH-21T-P1.1 BVH-21T-P1.1	Input
CN51	1: -V 2: -V 3: +V 4: +V	B4P-VH	VHR-4N	SVH-21T-P1.1 BVH-21T-P1.1	Output

### SWJ150P-\*\*

Terminal Name	Pin Number	Connector Type	Compliant Connectors	Conforming Contact	Remarks
CN101	1: AC(L) 2: - 3: AC(N) 4: - 5: FG	B3P5-VH	VHR-5N	SVH-21T-P1.1 BVH-21T-P1.1	Input
CN601	1: -V 2: -V 3: -V 4: +V 5: +V 6: +V	B6P-VH	VHR-6N	SVH-21T-P1.1 BVH-21T-P1.1	Output
CN603 (Option)	1: R/C+ 2: R/C-	B2B-XH-A	XHP-2	SXH-001T-P0.6 BXH-001T-P0.6	Remote-Control (Option)

### SWJ240P-\*\* / SWJ300P-\*\* / SWJ330X-\*\*

Terminal Name	Pin Number	Connector Type	Compliant Connectors	Conforming Contact	Remarks
CN101	1: AC(L) 2: - 3: AC(N) 4: - 5: FG	B3P5-VH	VHR-5N	SVH-21T-P1.1 BVH-21T-P1.1	Input
CN601	1: -V 2: -V 3: -V 4: -V 5: +V 6: +V 7: +V 8: +V	B8P-VH	VHR-8N	SVH-21T-P1.1 BVH-21T-P1.1	Output
CN603 (Option)	1: R/C+ 2: R/C-	B2B-XH-A	XHP-2	SXH-001T-P0.6 BXH-001T-P0.6	Remote-Control (Option)


(NOTE)

\* 2.4 pin of CN101 nothing


\* CN51and CN601 should be used at 5 A or less per pin(Rated output)

# 6. Derating

## SWJ Series

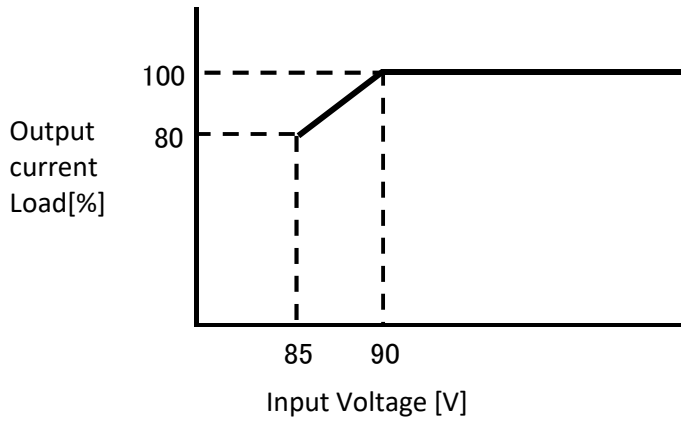


### SWJ075P-\*\*-\*\*

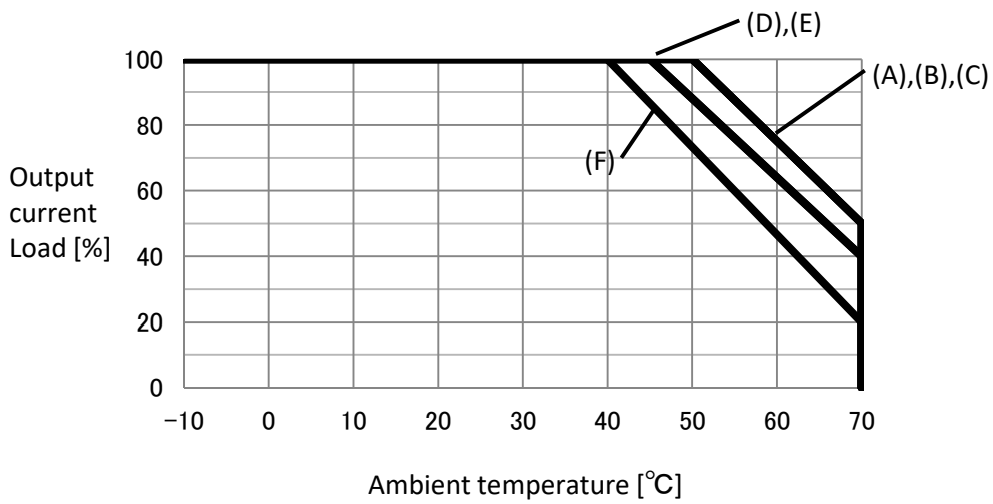

Reference: Derating Curve (Without Chassis & Cover)


### SWJ150P-\*\*-\*\*

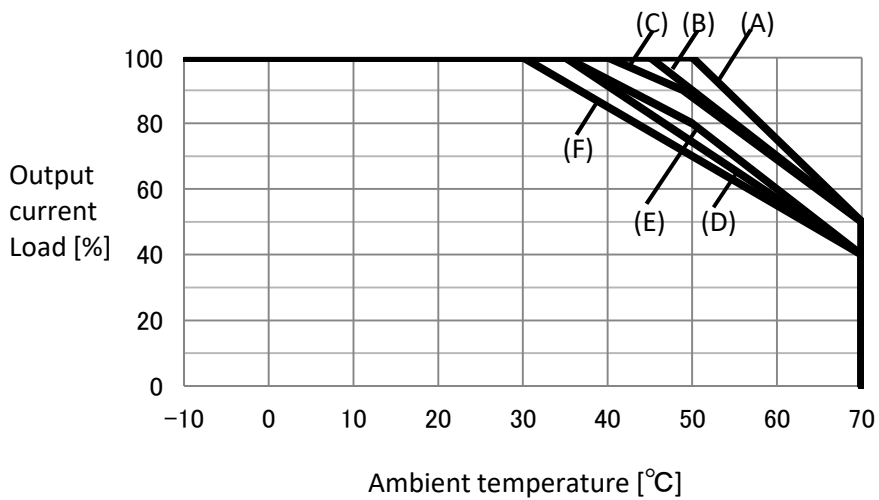

Reference: Derating Curve (Without Chassis & Cover)


# 6. Derating

SWJ240P-\*\*

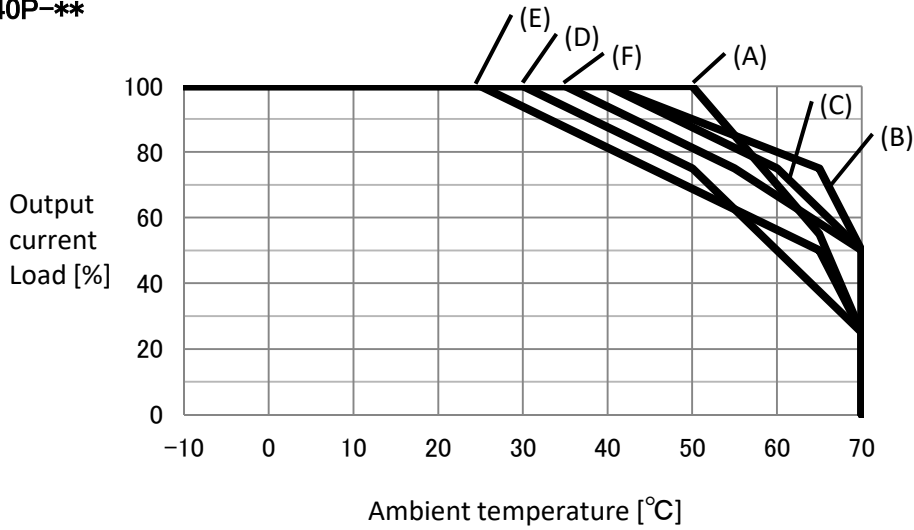


Reference : Derating Curve (Without Chassis & Cover)

SWJ300P-\*\*

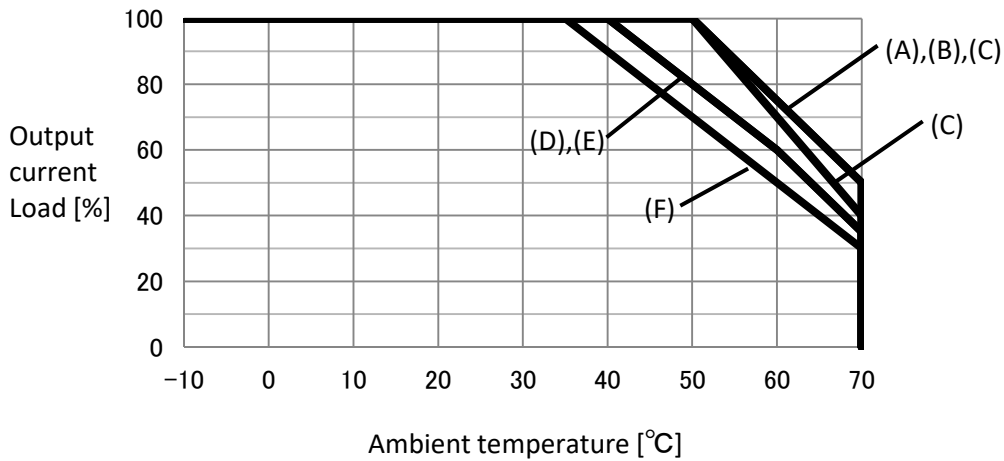

Reference : Derating Curve (Without Chassis & Cover)


SWJ330X-\*\*

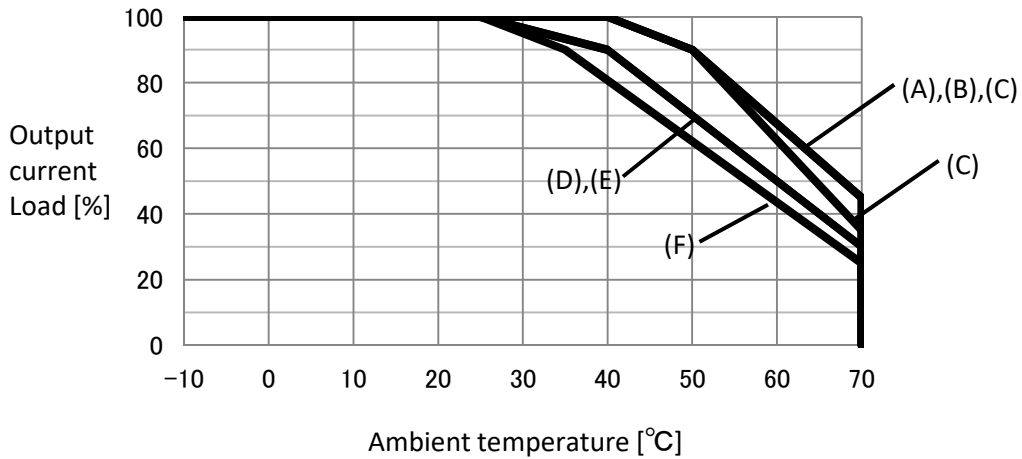

Reference : Derating Curve (Without Chassis & Cover)


# 7. Mounting Method

## ■ Mounting Method

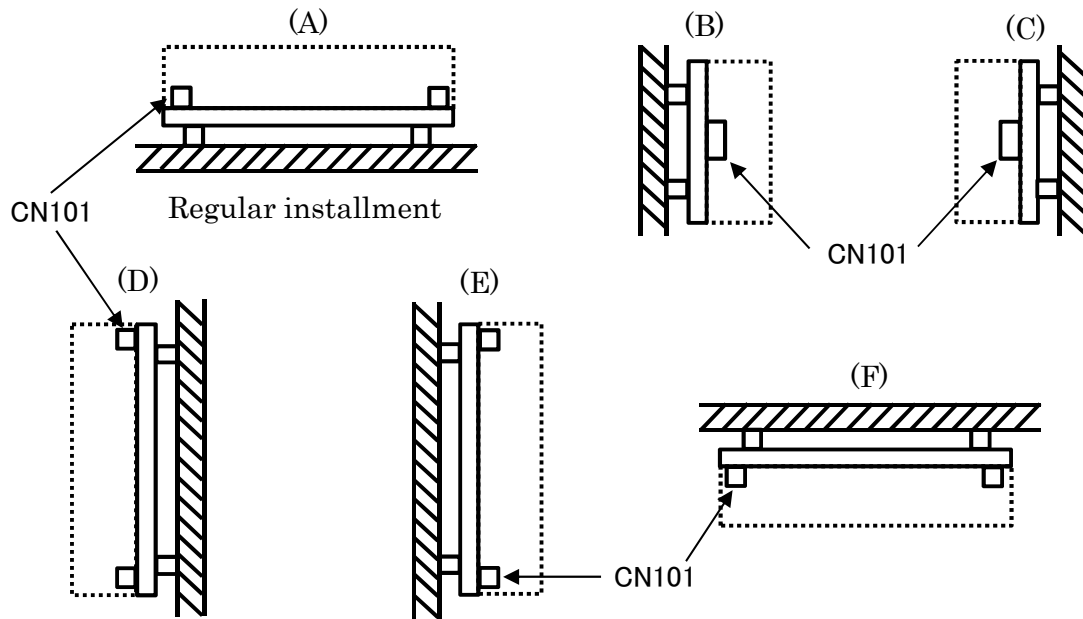

There is a high voltage within the power supply. Do not touch directly. This may lead to an electric shock. This power supply chassis is not compatible with power supply fixation only on the chassis side.

## ■ Insulation distance

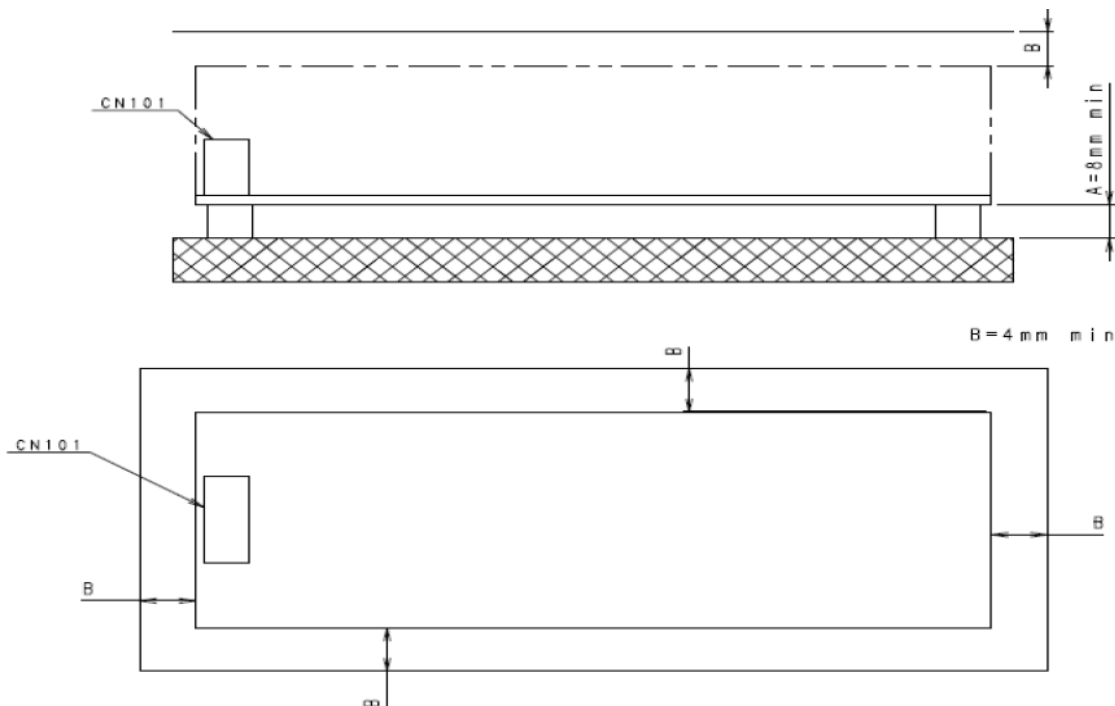

If a metal case is used, secure the dimensions of A and B for the separation between the power supply and the metal case.

This dimension is the necessary distance for the separation and does not satisfy the cool-down condition.


Ensure that the input FG terminal and the installation hole FG are earthed when installing the power supply.

※The protective earth conductor of the final device is not directly connected to the FG(CN101, mounting hole) in the power supply.


## 7. Mounting Method

### ■ Installation location

SWJ075P-\*\*-\*\* / SWJ150P-\*\*-\*\* / SWJ240P-\*\*-\*\*

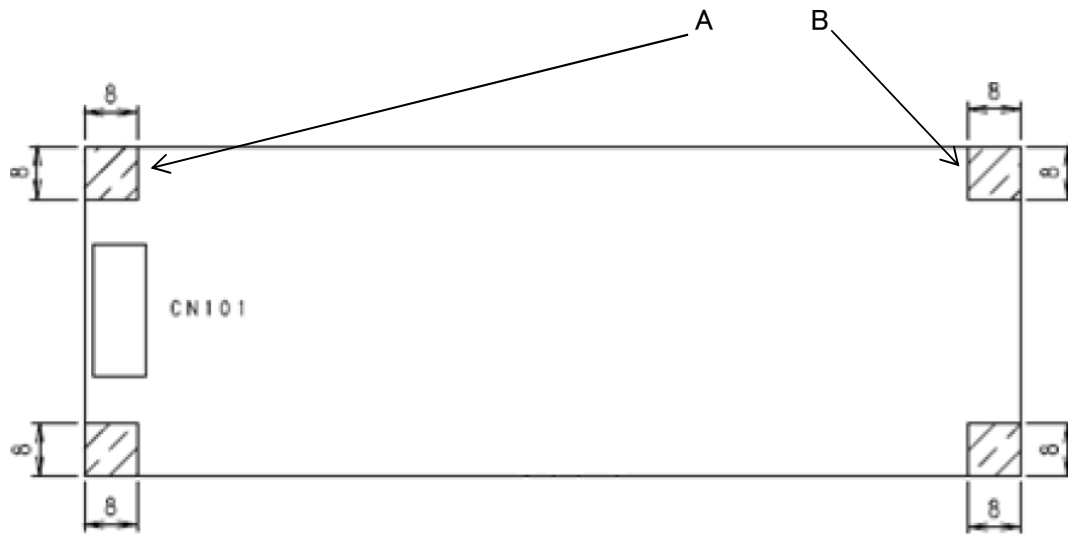

SWJ300P-\*\*-\*\* / SWJ330X-\*\*-\*\*

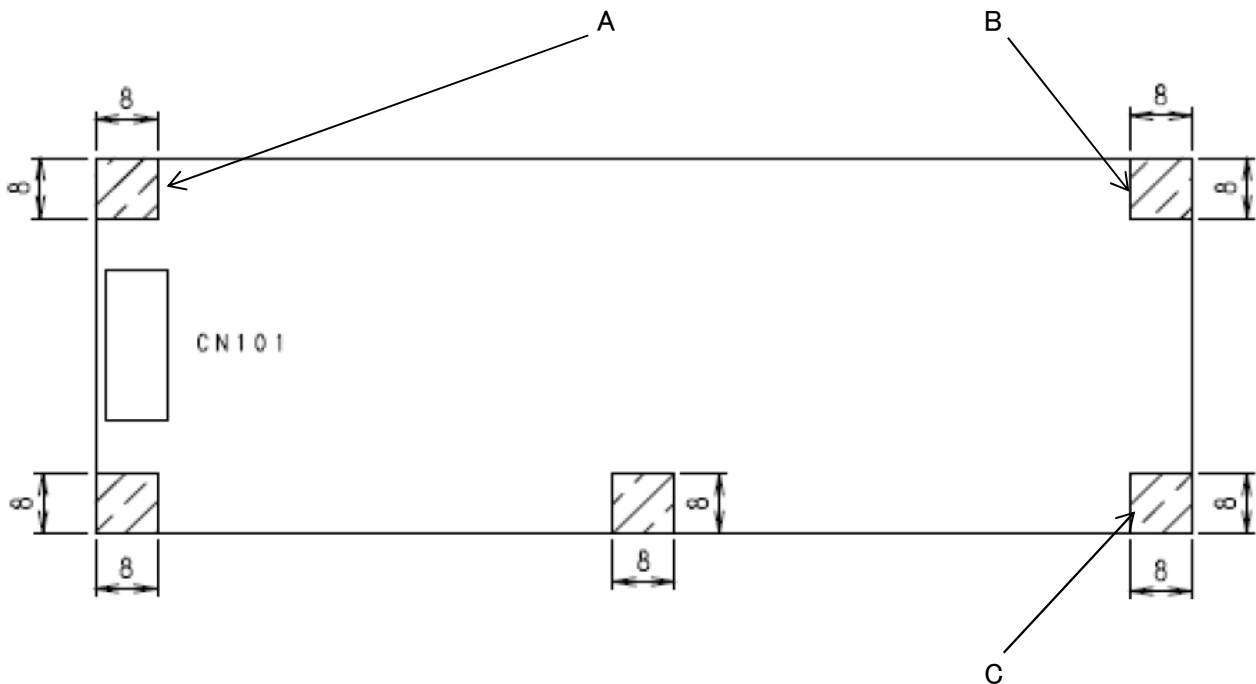

Use a small washer W sem screw M3 as the mounting screw.

Hatching indicates the allowable range for the metal part of the installation on the front side of the chip. The size of the hatched area is the distance required for the purpose of the decoupling.

Use the solders of A, B, and C in the figure with the customer's equipment frame(FG).

SWJ075P, the SWJ150P, and the SWJ240P : A and B are grounded.

SWJ300P: A, B, C

Because this product uses surface-mounting parts, please be aware of the installation method in which contact and stress are applied to the board at the time of installation.


Please contact us about the option installation method.



## 8. Dynamic load

Peak output current · Peak output power is 10 seconds or less, Duty: 35% or less.  
 The average value of the output current(power) during dynamic operation shall be less than the rated  
 In case of dynamic load,the root mean square value of the output current(power)  
 under the dynamic operation will be available with in the rated current(power).

(Example)

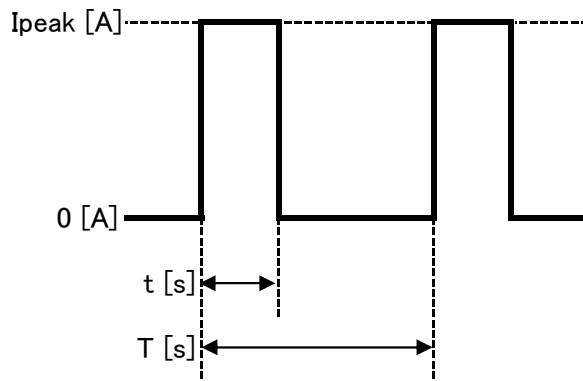


$$I_{rms} = \sqrt{\frac{t}{T}} \times I_{peak}$$

## 9. Remote ON/OFF Controls

SWJ-series can be remotely on/off (excluding SWJ075P).  
 However, the external DC power is required except for this SMPS.  
 Output is turned on if voltage of 4.5~5.5V between RC+ and RC-(1-2pin of connector CN603) is applied.  
 Output is turned off at voltage less than 0.8V or OPEN.  
 Outputs are off under 0.8V or open.  
 Please insert a current limiting resistor if the external DC power is high.

(Example)

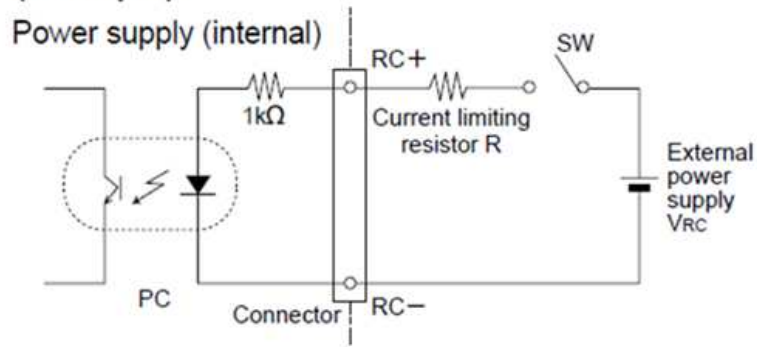

$$\text{Current limiting resistor } R = \frac{V_{RC} - 1V - 1k\Omega \times 5mA}{5mA}$$

(PC's forward drop = 1 V)

- \* Use twisted or shielded wires to prevent noise induction.
- \* The remote ON/OFF control circuit is insulated from the input, output, and FG.

## 10. Expected life

Type	Mounting Method	Ambient temperature	Loading factor	
			75%	100%
SWJ075P-**	A,B,C	Ta=50°C or less	4 years	3 years
	D,E	Ta=45°C or less	4 years	3 years
	F	Ta=40°C or less	5 years	4 years
SWJ150P-**	A	Ta=50°C or less	9 years	5 years
	B	Ta=45°C or less	10 years or more	8 years
	C	Ta=40°C or less	10 years or more	10 years or more
	D	Ta=35°C or less	10 years or more	10 years or more
	E	Ta=35°C or less	10 years or more	9 years
	F	Ta=30°C or less	10 years or more	10 years or more
SWJ240P-**	A	Ta=50°C or less	10 years or more	7 years
	B,C	Ta=40°C or less	10 years or more	7 years
	D	Ta=30°C or less	10 years or more	10 years or more
	E	Ta=25°C or less	10 years or more	8 years
	F	Ta=35°C or less	10 years or more	10 years or more
SWJ300P-**	A	Ta=50°C or less	9 years	5 years
	B	Ta=50°C or less	10 years or more	6 years
	C	Ta=50°C or less	4 years	2 years
	D	Ta=40°C or less	10 years or more	9 years
	E	Ta=40°C or less	8 years	3 years
	F	Ta=35°C or less	10 years or more	6 years
SWJ330X-**	A	Ta=40°C or less	10 years or more	9 years
	B	Ta=40°C or less	10 years or more	6 years
	C	Ta=40°C or less	6 years	3 years
	D	Ta=25°C or less	10 years or more	10 years or more
	E	Ta=25°C or less	10 years or more	7 years
	F	Ta=25°C or less	10 years or more	10 years or more

## 11. Warranty period

※ Conditions for use of the free warranty range  
 (We shall not be liable for any secondary damage caused by the failure or use of the Product.)  
 Use within the scope of the above table and five years after our factory shipment

### 【Exclusion conditions】

The following cases are excluded from free guarantees.

- ① Such as inadequate conditions, the environment, handling of products, and declines and shocks to products, Use under conditions exceeding the specifications
- ② Earthquakes, lightning, fire, wind and flood damage, and other natural disasters
- ③ By modifying, disassembling, and repairing products other than ourselves, Cases due to reasons other than our responsibilities
- ④ External factors such as abnormal voltage or other connected equipment



SANKEN ELECTRIC CO.,LTD.

● Home Page

<http://www.sanken-ele.co.jp>

---

Please contact below

Tokyo Office

Tokyu Building Higashi 5-gokan  
2-25-5, Minami-Ikebukuro, Toshima-ku, Tokyo  
171-002, Japan  
Phone: +81-3-3986-6151

Osaka Branch

Meiji Yasuda Seimei Osaka Umeda Bldg.  
3-3-20, Umeda, Kita-ku, Osaka-shi, Osaka  
530-0001, Japan  
Phone: +81-6-6450-4400

Nagoya Sales Office

Nagoya Crosscourt Tower  
4-4-10 Meieki, Nakamura-ku, Nagoya-shi, Aichi-ken  
450-0002, Japan  
Phone: +81-52-581-2767

Inquiry by E-mail

[sw.power@sanken-ele.co.jp](mailto:sw.power@sanken-ele.co.jp)

---

PAN40010-001E-10

● This promotion sheet is as of October 2020.

● Please note that the contents are subject to change without notice for product improvement.