


ダーリントン 2SD2015



シリコンNPN三重拡散プレーナ型トランジスタ

用途：ソレノイド、リレー、モータ駆動、一般用


絶対最大定格 (Ta=25)

記号	規格値	単位
V _{CB0}	150	V
V _{CEO}	120	V
V _{EBO}	6	V
I _C	4	A
I _B	0.5	A
P _C	25(T _C =25)	W
T _J	150	
T _{stg}	-55 ~ +150	

電気的特性 (Ta=25)

記号	試験条件	規格値	単位
I _{CB0}	V _{CB} = 150V	10max	μA
I _{EBO}	V _{EB} = 6V	10max	mA
V _{(BR)CEO}	I _C = 10mA	120min	V
h _{FE}	V _{CE} = 2V, I _C = 2A	2000min	
V _{CE(sat)}	I _C = 2A, I _B = 2mA	1.5max	V
V _{BE(sat)}	I _C = 2A, I _B = 2mA	2.0max	V
f _T	V _{CE} = 12V, I _E = -0.1A	40typ	MHz
COB	V _{CB} = 10V, f = 1MHz	40typ	pF


外形図 FM20(T0220F)

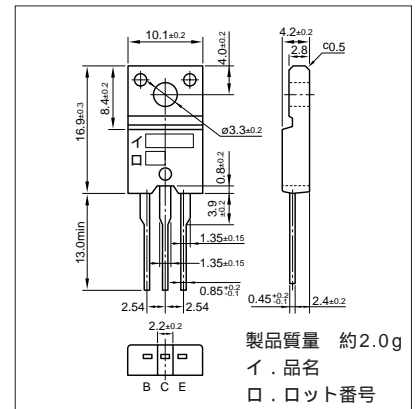


代表的スイッチング特性 (エミッタ接地)

V _{CC} (V)	R _L (Ω)	I _C (A)	V _{BB1} (V)	V _{BB2} (V)	I _{B1} (mA)	I _{B2} (mA)	t _{on} (μs)	t _{stg} (μs)	t _f (μs)
40	20	2	10	-5	10	-10	0.6typ	5.0typ	2.0typ


I_C-V_{CE}特性 (代表例)

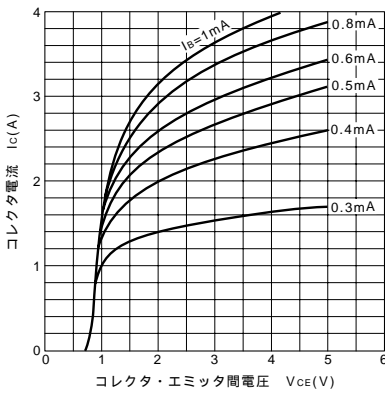


V_{CE(sat)}-I_B特性 (代表例)

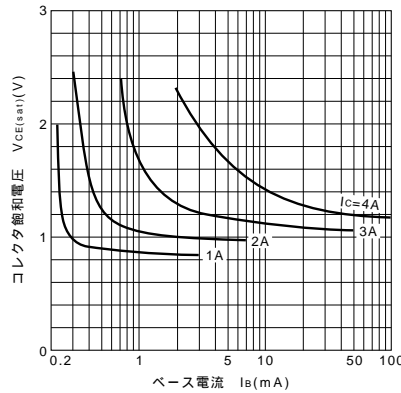


I_C-V_{BE}温度特性 (代表例)

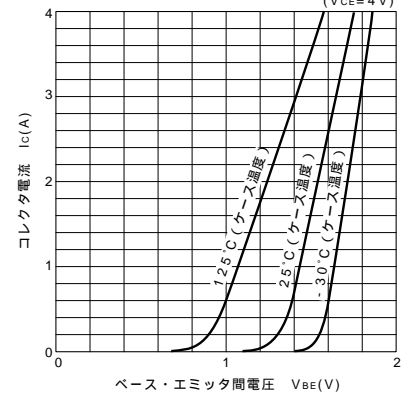


h_{FE}-I_C特性 (代表例)

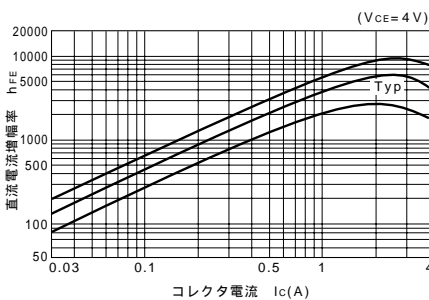


h_{FE}-I_C温度特性 (代表例)

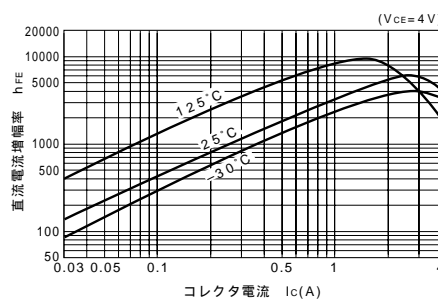


θ_{j-a}-t特性

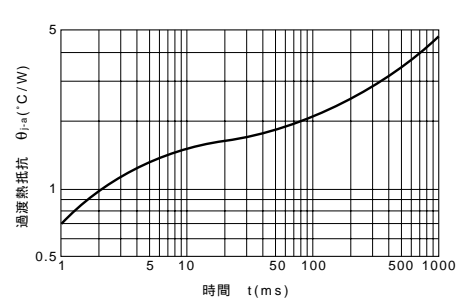

f_T-I_E特性 (代表例)

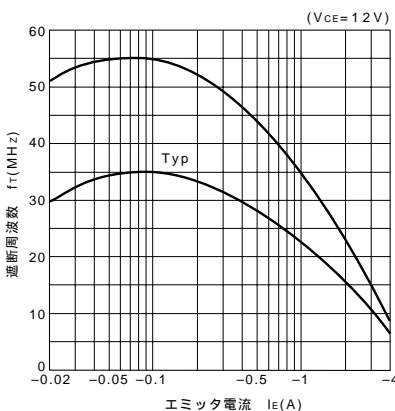

ASO曲線 (単発パルス)

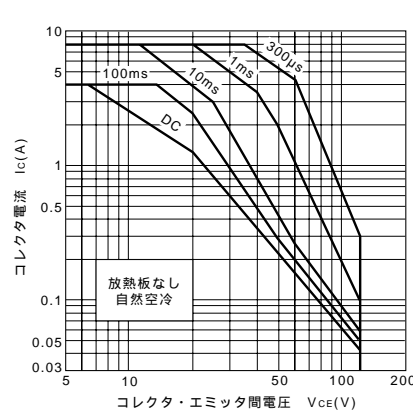

P_C-T_a定格

