


The length of screws into this unit when installing has to be 6mm at the maximum.
 The input/output current for each contacts of the terminal block has to be 20A per one contact at the maximum.
 The torque of chassis installation screws: 0.49Nm
 The torque of terminal block screws: 1.1Nm
 The safety earth has to be connected to two of chassis installation screws(M3).

External dimensions (150W)

SP10062 - G

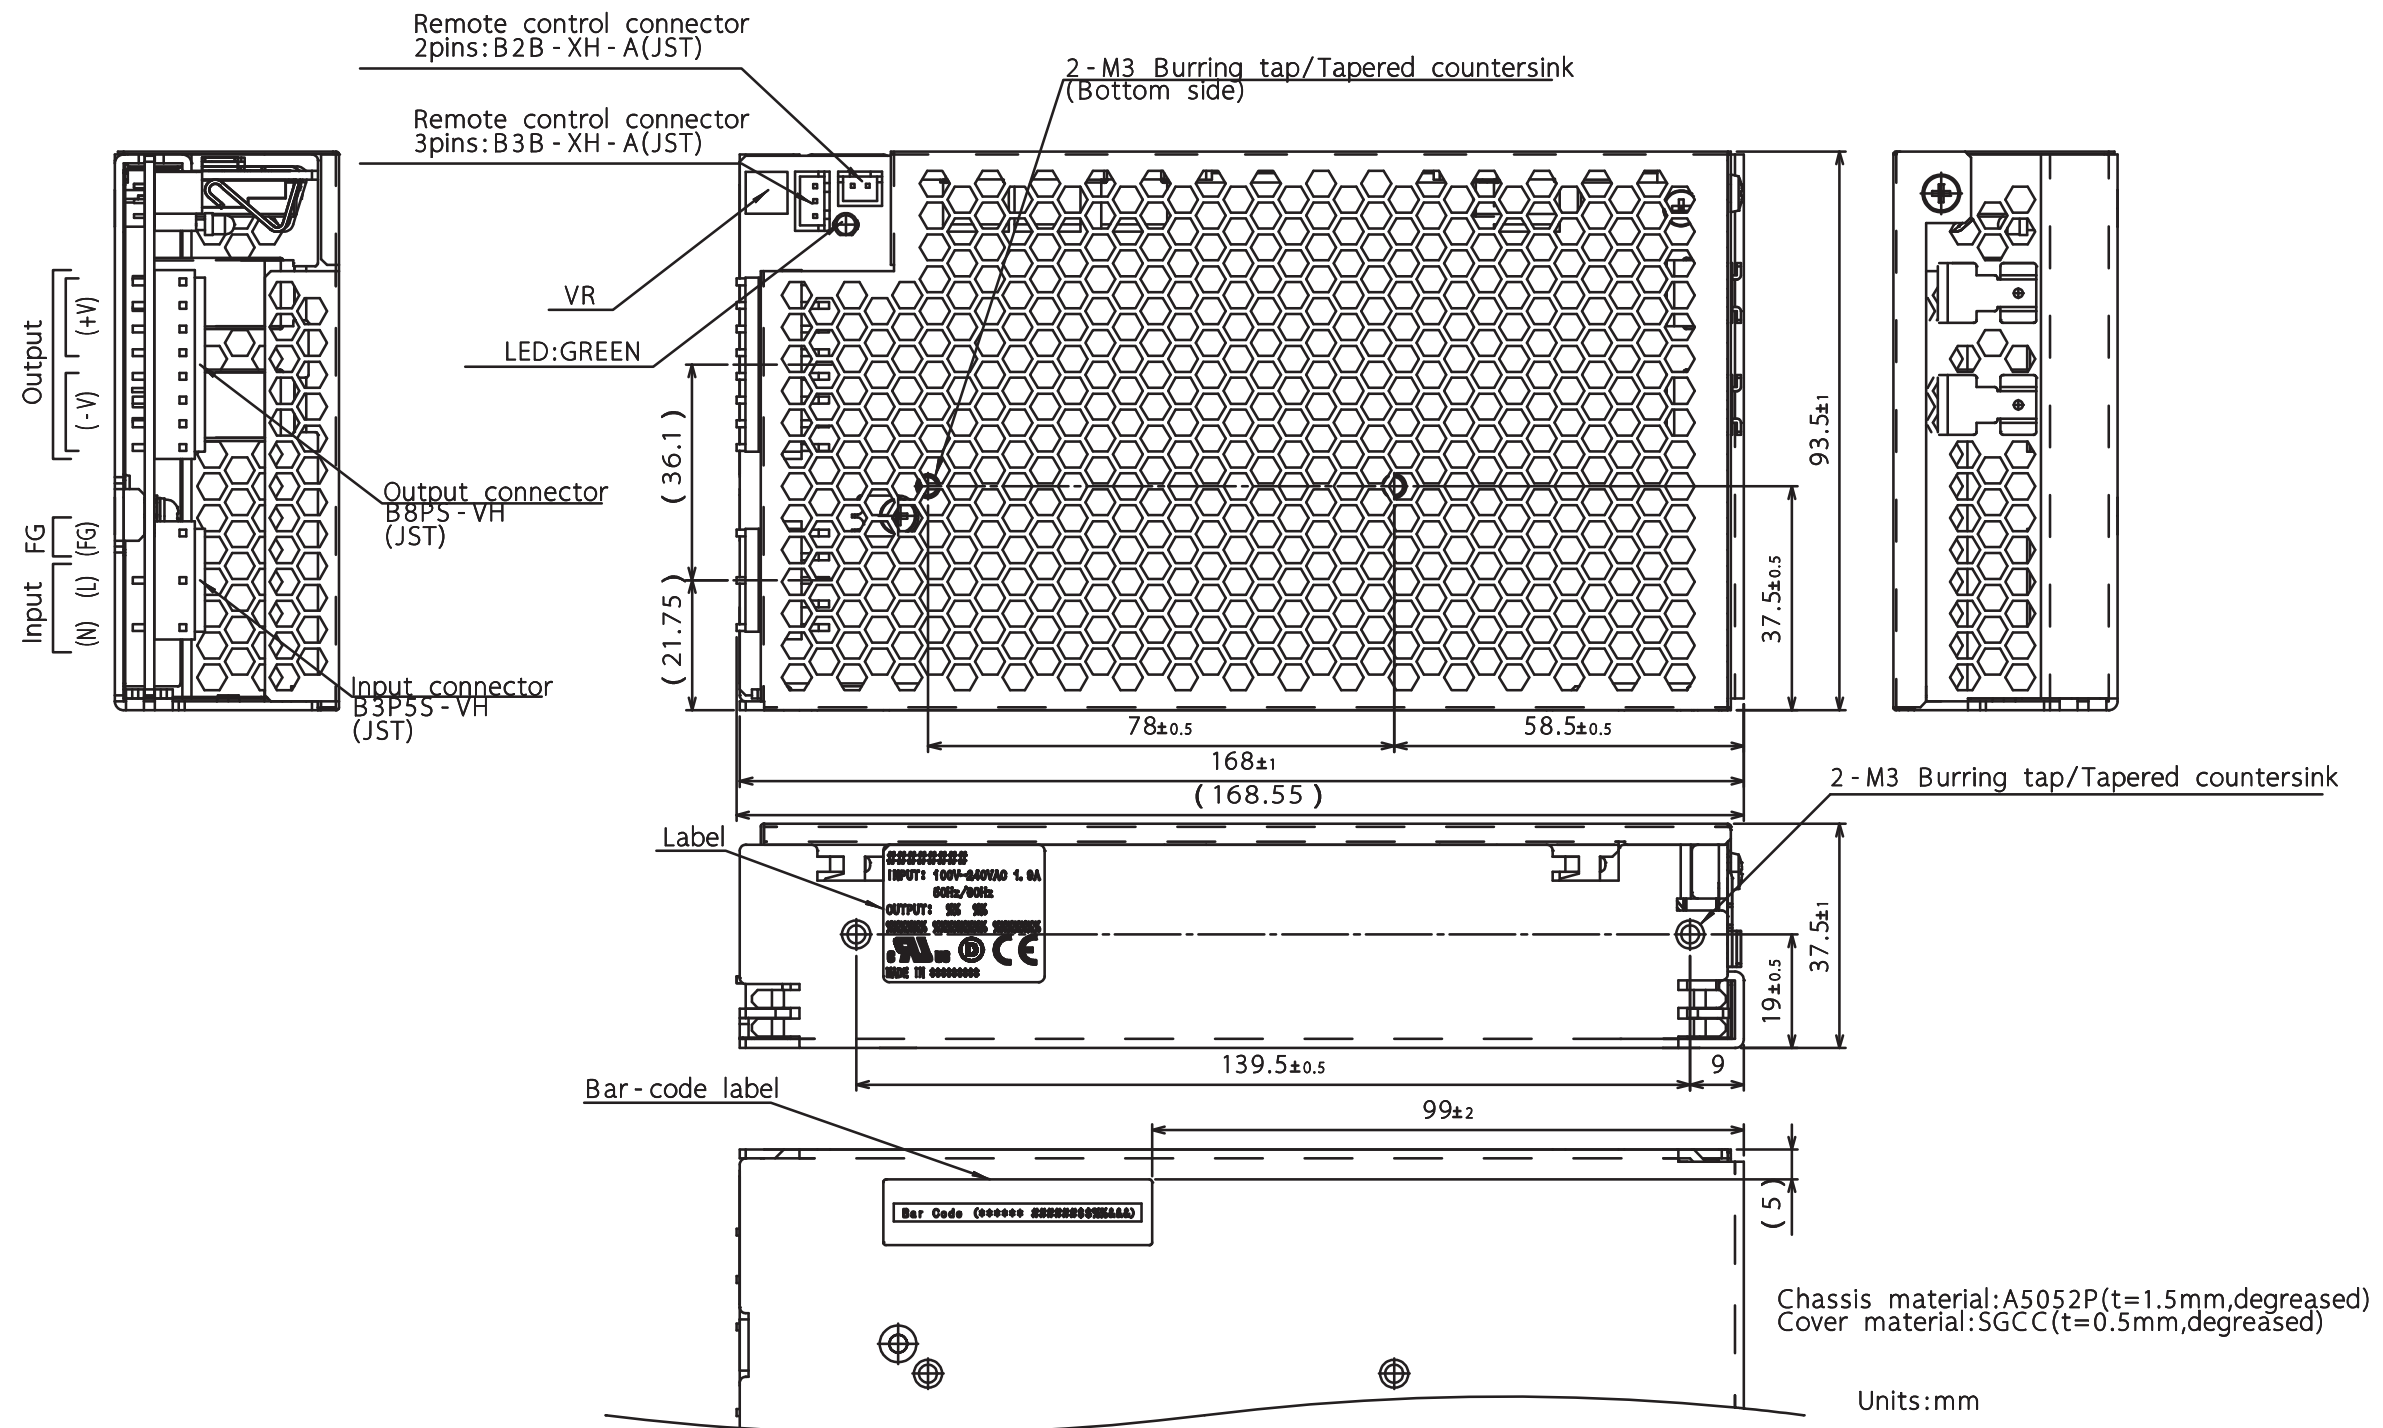

The length of screws into this unit when installing has to be 6mm at the maximum.
 The torque of chassis installation screws: 0.49Nm
 The safety earth has to be connected to two of chassis installation screws(M3).

External dimensions (150W)

SP10064 - G