

## Absolute maximum ratings

( $T_a=25^\circ\text{C}$ )


| Symbol              | Ratings                                                                            | Unit               |
|---------------------|------------------------------------------------------------------------------------|--------------------|
| $V_{DSS}$           | -60                                                                                | V                  |
| $V_{GSS}$           | $\pm 20$                                                                           | V                  |
| $I_D$               | -5                                                                                 | A                  |
| $I_D(\text{pulse})$ | -10 ( $PW \leq 1\text{ms}$ , $\text{duty} \leq 25\%$ )                             | A                  |
| $P_T$               | 5 ( $T_a=25^\circ\text{C}$ , with all circuits operating, without heatsink)        | W                  |
|                     | 30 ( $T_c=25^\circ\text{C}$ , with all circuits operating, with infinite heatsink) |                    |
| $\theta_{j-a}$      | 25 (Junction-Air, $T_a=25^\circ\text{C}$ , with all circuits operating)            | $^\circ\text{C/W}$ |
| $\theta_{j-c}$      | 4.17 (Junction-Case, $T_c=25^\circ\text{C}$ , with all circuits operating)         | $^\circ\text{C/W}$ |
| $V_{ISO}$           | 1000 (Between fin and lead pin, AC)                                                | V <sub>rms</sub>   |
| $T_{ch}$            | 150                                                                                | $^\circ\text{C}$   |
| $T_{stg}$           | -40 to +150                                                                        | $^\circ\text{C}$   |

## Electrical characteristics










( $T_a=25^\circ\text{C}$ )

| Symbol        | Specification |      |           | Unit          | Conditions                                                                                                         |
|---------------|---------------|------|-----------|---------------|--------------------------------------------------------------------------------------------------------------------|
|               | min           | typ  | max       |               |                                                                                                                    |
| $V_{(BR)DSS}$ | -60           |      |           | V             | $I_D=-100\mu\text{A}$ , $V_{GS}=0\text{V}$                                                                         |
| $I_{GSS}$     |               |      | $\pm 100$ | nA            | $V_{GS}=\pm 20\text{V}$                                                                                            |
| $I_{DSS}$     |               |      | -100      | $\mu\text{A}$ | $V_{DS}=-60\text{V}$ , $V_{GS}=0\text{V}$                                                                          |
| $V_{TH}$      | -1.0          |      | -2.0      | V             | $V_{DS}=-10\text{V}$ , $I_D=-250\mu\text{A}$                                                                       |
| $R_{e(yfs)}$  | 4             | 6    |           | S             | $V_{DS}=-10\text{V}$ , $I_D=-3\text{A}$                                                                            |
| $R_{DS(ON)}$  |               | 0.14 | 0.22      | $\Omega$      | $V_{GS}=-10\text{V}$ , $I_D=-3\text{A}$                                                                            |
| $C_{iss}$     |               | 790  |           | pF            | $V_{DS}=-10\text{V}$ ,<br>$f=1.0\text{MHz}$ ,<br>$V_{GS}=0\text{V}$                                                |
| $C_{oss}$     |               | 310  |           | pF            |                                                                                                                    |
| $C_{rss}$     |               | 90   |           | pF            |                                                                                                                    |
| $t_{d(on)}$   |               | 40   |           | ns            | $I_D=-3\text{A}$ , $V_{DD}=-20\text{V}$ ,<br>$R_L=6.67\Omega$ ,<br>$V_{GS}=-5\text{V}$ ,<br>see Fig. 4 on page 16. |
| $t_r$         |               | 110  |           | ns            |                                                                                                                    |
| $t_{d(off)}$  |               | 160  |           | ns            |                                                                                                                    |
| $t_f$         |               | 80   |           | ns            |                                                                                                                    |
| $V_{SD}$      | -1.0          | -1.5 |           | V             |                                                                                                                    |
| $t_{rr}$      |               | 85   |           | ns            | $I_{SD}=3\text{A}$ , $V_{GS}=0\text{V}$ , $di/dt=100\text{A}/\mu\text{s}$                                          |


## Equivalent circuit diagram

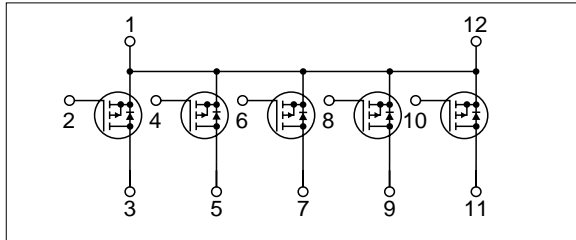


## Characteristic curves

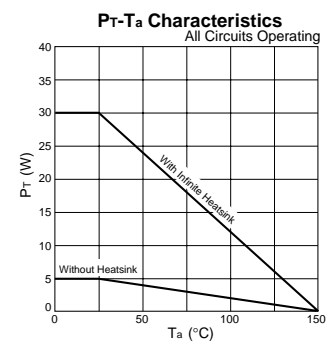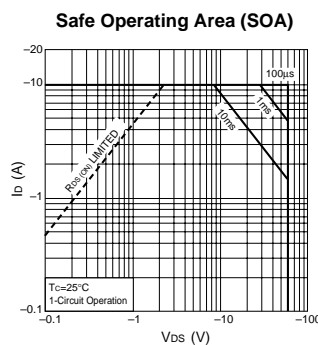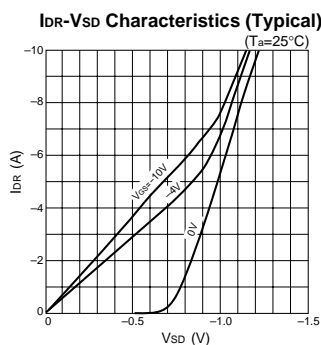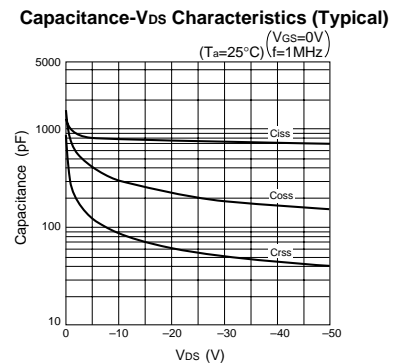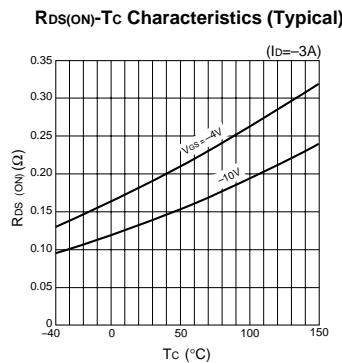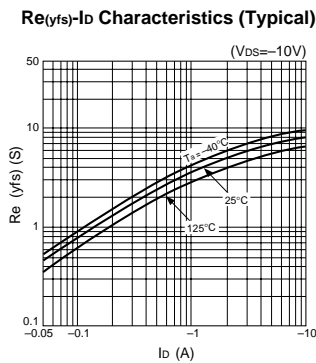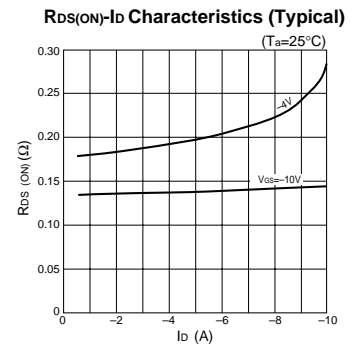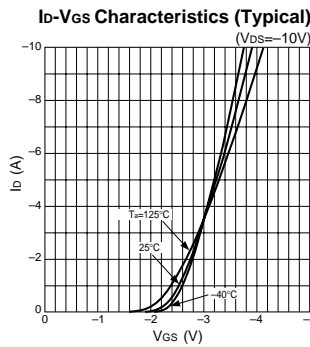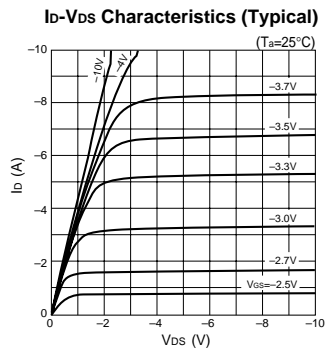


• SIP 8 (STA8Pin)

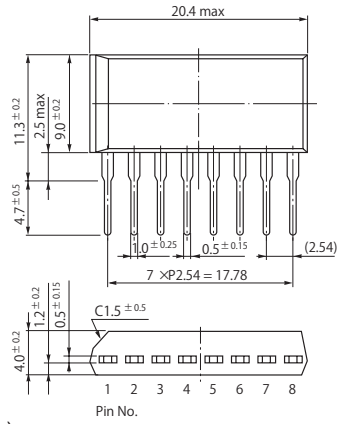


• SIP 10 (STA10Pin)

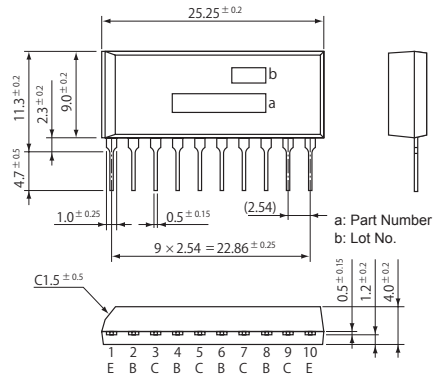


• SIP 12 (SMA12Pin)

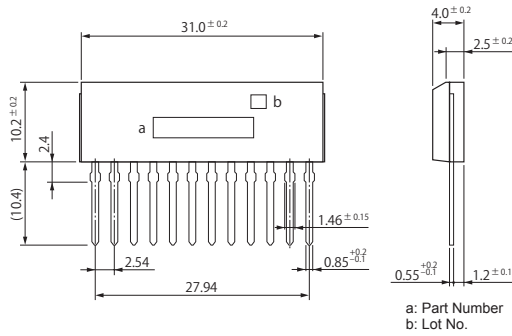


• SIP 15 (SMA15Pin)

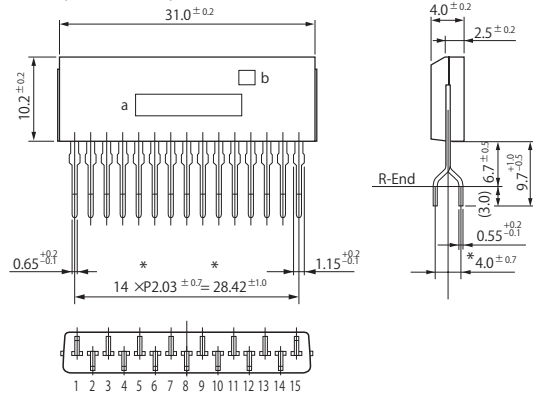


• SIP 12 with Fin (SLA12Pin)

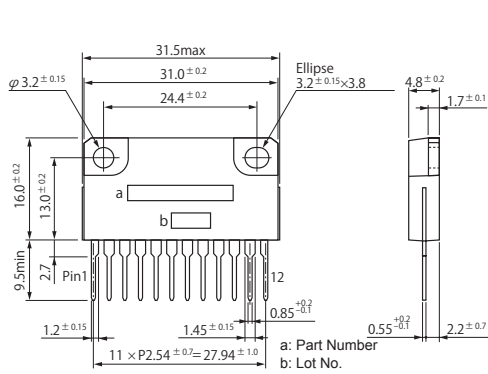

• SIP 15 with Fin (SLA15Pin)

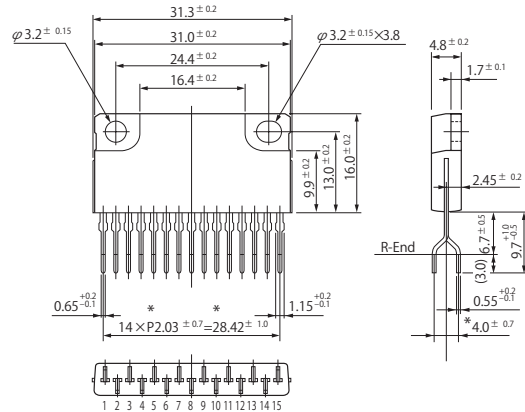

• SIP 21 with Fin (SLA21Pin)

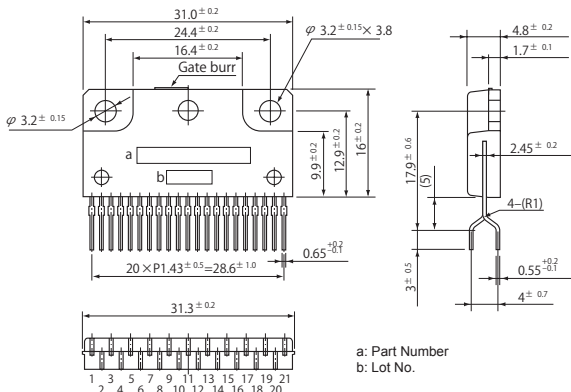

(Unit:mm)