

Data Sheet

Surface Molding Series Regulator IC

SI-3000KM series

Not Recommended for New Designs:
SI-3025KM, SI-3050KM, SI-3090KM

Rev.3.0

SANKEN ELECTRIC CO., LTD.

— — — Contents — — —

1. General Description		
1-1 Features	-----	3
1-2 Application	-----	3
1-3 Type	-----	3
2. Specification		
2-1 Package Information	-----	4
2-2 Ratings	-----	5
2-3 Circuit Diagram	-----	9
3. Operational Description		
3-1 Voltage Control	-----	10
3-2 Overcurrent Protection	-----	10
3-3 Thermal Shutdown	-----	11
4. Cautions		
4-1 External Components	-----	12
4-2 Pattern Design Notes	-----	13
5. Applications		
5-1 Output ON / OFF Control	-----	14
5-2 Thermal Design	-----	14
6. Typical Characteristics		
6-1 SI-3012KM	-----	16
6-2 SI-3010KM	-----	18

1. General Description

The SI-3000KM is a series regulator IC using a hyposaturation type PNP bipolar transistor in the power section and it can be used with the low difference of input/output voltages. It is provided with an ON / OFF terminal which operates in Active High mode and the current consumption of circuits at OFF time is zero.

● 1-1 Features

- Output current: 1A
Output current is 1A at maximum with the outline of TO-252-5L.
- Hyposaturation ($V_{dif} = 0.6 V_{max} / I_o = 1A$)
It can be designed with low difference of input/output voltages.
- ON/OFF function
The ON/OFF terminal which can be directly controlled by TLL logic signals is provided.
- Low current consumption
Current consumption of circuits at OFF time is zero.
Quiescent Current at no load is 600 μ A at maximum.
- High ripple attenuation ratio
75dB: $f = 100$ to 120kHz at $V_o = 5V$
- Built-in Overcurrent protection / Thermal shutdown
The automatic restoration and Foldback type overcurrent protection and Thermal shutdown circuit are built in.

● 1-2 Application

For on-board local power supplies, power supplies for OA equipment, stabilization of secondary output voltage of regulator and power supply for communication equipment


● 1-3 Type

- Type: Semiconductor integrated circuits (monolithic IC)
- Structure: Resin molding type (transfer molding)

2. Specification

Unit: mm

● 2-1 Package Information

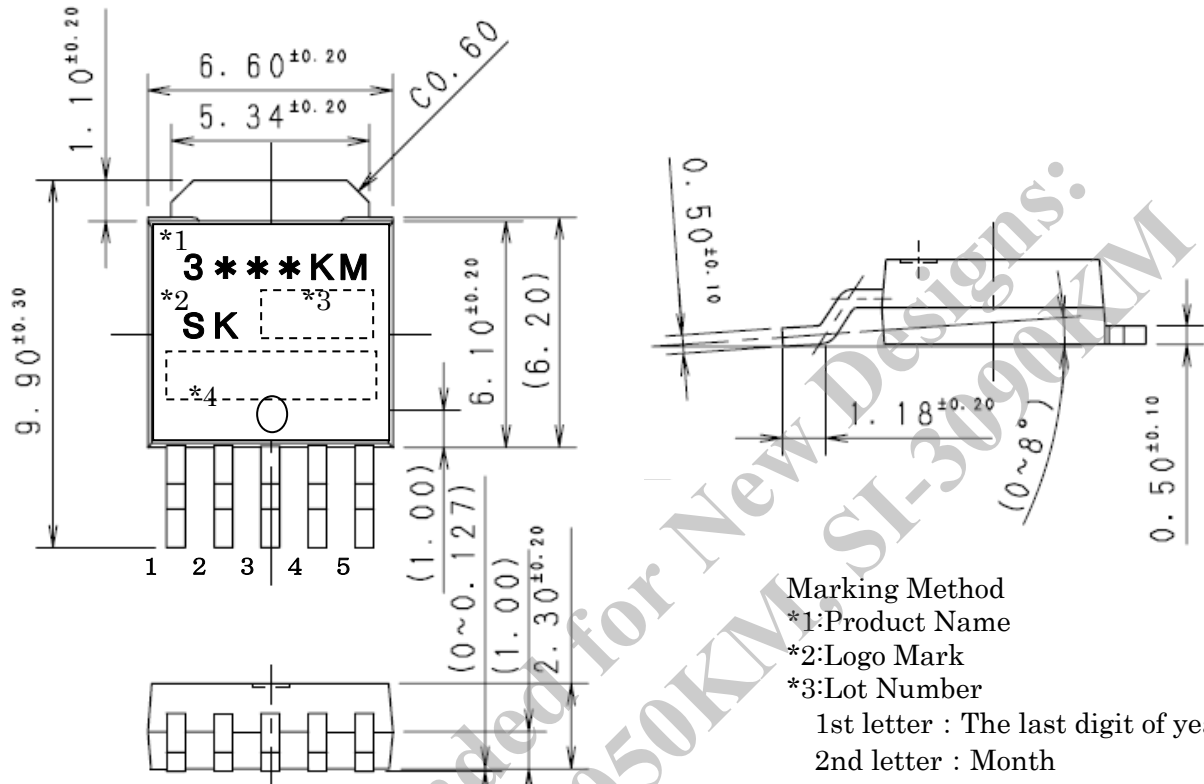

Pin assignment

1. Vc
2. VIN
3. GND
4. Vout
5. Sense (or ADJ terminal for SI-3010KM/SI-3012KM)

Marking Method

*1:Product Name

*2:Logo Mark

*3:Lot Number

1st letter : The last digit of year

2nd letter : Month

1 to 9 for Jan. to Sept., O for Oct.

N for Nov. D for Dec.

3rd letter : day

1 to 9day : for " 1" to "9"

10 to 31day : for "A" to "Z"

(But, " B", "I", "O", "Q" is removed.

*4:Administer number (Seven digit)

The stem part has same potential as No. 3 pin (GND).

Product mass: about 0.33 g

● 2-2 Ratings

2-2-1 Absolute Maximum Ratings

$T_a = 25^{\circ}\text{C}$

Parameter	Symbol	Ratings		Units
		SI-3012KM/3033KM	SI-3010KM/3090KM /3120KM	
DC Input Voltage	V_{IN}	17	35* ¹	V
Output Control Terminal Voltage	V_C	V_{IN}		V
DC Output Current	I_o	1.0		A
Power Dissipation	P_D * ²	1		W
Junction Temperature	T_j	-30 to +125		$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-30 to +125		$^{\circ}\text{C}$
Thermal Resistance (Junction to Air)	θ_{j-a}	95		$^{\circ}\text{C/W}$
Thermal Resistance (Junction to Case)	θ_{j-c}	6		$^{\circ}\text{C/W}$

*1: A built-in input-overvoltage-protection circuit shuts down the output voltage at the Input Overvoltage Shutdown Voltage of the electrical characteristics.

*2: When mounted on glass-epoxy board of 900mm² (copper laminate area 4.3%).

2-2-2 Recommended Conditions

Parameter	Symbol	Ratings					Units
		SI-3012KM	SI-3033KM	SI-3010KM	SI-3090KM	SI-3120KM	
Input Voltage	V_{IN}	2.4* ² to 6.0* ¹	* ² to 6.0* ¹	2.4* ² to 27* ¹	* ² to 20* ¹	* ² to 25* ¹	V
Output Current	I_o	0 to 1.0					A
Operational Ambient Temperature	T_{op}	-30 to 85					$^{\circ}\text{C}$
Junction Temperature in Operation	T_j	-20 to 100					$^{\circ}\text{C}$

*1: V_{IN} (max) and I_o (max) are restricted by the relationship P_D (max) = $(V_{IN} - V_o) \times I_o$.

*2: Refer to the Dropout Voltage parameter.

2-2-3 Electrical Characteristics(1) (SI-3012KM, SI-3033KM) $T_a = 25^{\circ}\text{C}$

Parameter		Symbol	Ratings						Units
			SI-3012KM(Vo adjustable)			SI-3033KM			
			min	typ	max	min	typ	max	
Input Voltage		V _{IN}	2.4* ¹			* ¹			V
Output Voltage Settings		V _O (V _{adj})	(1.24)	(1.28)	(1.32)	3.234	3.300	3.366	V
		Conditions	V _{IN} =3.3V,Io=10mA			V _{IN} =5V,Io=10mA			
Line Regulation		ΔV _{OLINE}			15			15	mV
		Conditions	VIN=3.3 to 8V, Io=10mA(Vo=2.5V)			V _{IN} =3.3V,Io=10mA			
Load Regulation		ΔV _{OLOAD}			40			50	mV
		Conditions	V _{IN} =3.3V, Io=0 to 1A(Vo=2.5V)			V _{IN} =5V, Io=0 to 1A			
Dropout Voltage		V _{DIF1}			0.4			0.4	V
		Conditions	Io=0.5A(Vo=2.5V)			Io=0.5A			
		V _{DIF2}			0.6			0.6	
		Conditions	Io=1A(Vo=2.5V)			Io=1A			
Quiescent Circuit Current		I _q			350			350	μA
		Conditions	V _{IN} =3.3V,Io=0A,V _C =2V, R2=24kΩ			V _{IN} =5V,Io=0A,V _C =2V			
Circuit Current at Output OFF		I _q (OFF)			1			1	μA
		Conditions	V _{IN} =3.3V,V _C =0V			V _{IN} =5V,V _C =0V			
Temperature Coefficient of Output Voltage		ΔVo/ ΔTa		±0.3			±0.3		mV/°C
		Conditions	T _j =0 to 100°C(Vo=2.5V)			T _j =0 to 100°C			
Ripple Rejection		R _{REJ}		55			55		dB
		Conditions	V _{IN} =3.3V,f=100 to 120Hz,Vo=2.5V			I _N =5V,f=100 to 120Hz			
Overcurrent Protection Starting Current* ²		I _{S1}	1.1			1.1			A
		Conditions	V _{IN} =3.3V			V _{IN} =5V			
V _C Terminal	Control Voltage (Output ON)* ³	V _{C,IH}	2.2			2.2			V
	Control Voltage (Output OFF)	V _{C,IL}			0.8			0.8	
	Control Current (Output ON)	I _{C,IH}			40			40	μA
		Conditions	V _C =2V			V _C =2V			
	Control Current (Output OFF)	I _{C,IL}	-5	0		-5	0		
		Conditions	V _C =0V			V _C =0V			

*1: Refer to the clause of a difference in input and output voltage.

*2: I_{S1} is specified at the 5% drop point of output voltage V_o on the condition that V_{IN} = overcurrent protection starting current, $I_o = 10\text{ mA}$.

*3: Output is OFF when the output control terminal V_c is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.

Attention ...

As $PD = (V_{IN} - V_o) \times I_o$, $V_{IN}(\text{max.})$ and $I_o(\text{amx.})$ must be referred to the data of p.17, copper area vs power dissipation upon actual applications.

2-2-3 Electrical Characteristics(2) (SI-3010KM, SI-3090KM) $T_a = 25^\circ\text{C}$

Parameter		Symbol	Ratings						Units
			SI-3010KM(Vo adjustable)			SI-3090KM			
			min	typ	max	min	typ	max	
Input Voltage		VIN	2.4*1			*1			V
Output Voltage Settings		VO or (Vadj)	(0.98)	(1.00)	(1.02)	8.82	9.00	9.18	V
		Conditions	VIN=7V,Io=10mA			VIN=11V,Io=10mA			
Line Regulation		ΔVOLUME			30			54	mV
		Conditions	VIN=6 to 11V, Io=10mA(Vo=5V)			VIN=10 to 15V,Io=10mA			
Load Regulation		ΔVLOAD			75			40	mV
		Conditions	VIN=7V, Io=0 to 1A(Vo=5V)			VIN=11V, Io=0 to 1A			
Dropout Voltage		VDIF1			0.3			0.3	V
		Conditions	Io=0.5A(Vo=5V)			Io=0.5A			
		VDIF2			0.6			0.6	
		Conditions	Io=1A(Vo=5V)			Io=1A			
Quiescent Circuit Current		Iq			600			600	μA
		Conditions	VIN=7V,Io=0A,Vc=2V, R2=10kΩ			VIN=11,Io=0A,Vc=2V			
Circuit Current at Output OFF		Iq(OFF)			1			1	μA
		Conditions	VIN=7V,Vc=0V			VIN=11V,Vc=0V			
Temperature Coefficient of Output Voltage		ΔVo/ΔTa		±0.5			±1.0		mV/°C
		Conditions	Tj=0 to 100°C(Vo=5V)			Tj=0 to 100°C			
Ripple Rejection		RREJ		75			68		dB
		Conditions	VIN=7V,f=100 to 120Hz,Vo=5V			VIN=11V,f=100 to 120Hz			
Overcurrent Protection Starting Current*2		IS1	1.1			1.1			A
		Conditions	VIN=7V			VIN=11V			
VC Terminal	Control Voltage (Output ON)*3	VC,IH	2.0			2.0			V
	Control Voltage (Output OFF)	VC,IL			0.8			0.8	
	Control Current (Output ON)	IC,IH			40			40	μA
		Conditions	VC=2V			VC=2V			
	Control Current (Output OFF)	IC,IL	-5	0		-5	0		
		Conditions	VC=0V			VC=0V			
Input Overvoltage Shutdown Voltage		VOVP	33			30			V
		Conditions	Io=10mA			Io=10mA			

*1: Refer to the clause of a difference in input and output voltage.

*2: I_{S1} is specified at the 5% drop point of output voltage V_o on the condition that V_{IN} = overcurrent protection starting current, $I_o = 10 \text{ mA}$.

*3: Output is OFF when the output control terminal V_C is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.

Attention ...

SI-3010KM, SI-3090KM cannot be used in the following applications because the built-in foldback-type overcurrent protection may cause errors during start-up stage;

(1) Constant current load (2) Positive and negative power supply (3) Series-connected power supply (4) V_o adjustment by raising ground voltage

As $PD = (V_{IN} - V_o) \times I_o$, $V_{IN}(\text{max.})$ and $I_o(\text{max.})$ must be referred to the data of p.17, copper area vs power dissipation upon actual applications.

2-2-3 Electrical Characteristics(3) (SI-3120KM) $T_a = 25^\circ\text{C}$

Parameter		Symbol	Ratings			Units
			SI-3120KM			
			min	typ	max	
Input Voltage		V_{IN}	*1			V
Output Voltage Settings		V_O or (V_{adj})	11.76	12.00	12.24	V
		Conditions	$V_{IN}=7V, I_o=10mA$			
Line Regulation		ΔV_{OLINE}			72	mV
		Conditions	$V_{IN}=13$ to $18V$, $I_o=10mA$			
Load Regulation		ΔV_{OLOAD}			180	mV
		Conditions	$V_{IN}=14V, I_o=0$ to $1A$			
Dropout Voltage		V_{DIF1}			0.3	V
		Conditions	$I_o=0.5A$			
		V_{DIF2}			0.6	
		Conditions	$I_o=1A$			
Quiescent Circuit Current		I_q			600	μA
		Conditions	$V_{IN}=14V, I_o=0A, V_C=2V$,			
Circuit Current at Output OFF		$I_q(OFF)$			1	μA
		Conditions	$V_{IN}=7V, V_C=0V$			
Temperature Coefficient of Output Voltage		$\Delta V_o / \Delta T_a$		± 1.5		mV/ $^{\circ}C$
		Conditions	$T_j=0$ to $100^{\circ}C$			
Ripple Rejection		R_{REJ}		66		dB
		Conditions	$V_{IN}=14V, f=100$ to $120Hz$			
Overcurrent Protection Starting Current*2		I_{S1}	1.1			A
		Conditions	$V_{IN}=14V$			
V_C Terminal	Control Voltage (Output ON)*3	$V_{C, IH}$	2.0			V
	Control Voltage (Output OFF)	$V_{C, IL}$			0.8	
	Control Current (Output ON)	$I_{C, IH}$			40	μA
		Conditions	$V_C=2V$			
	Control Current (Output OFF)	$I_{C, IL}$	-5	0		
		Conditions	$V_C=0V$			
Input Overvoltage Shutdown Voltage		V_{OVP}	33			V
		Conditions	$I_o=10mA$			

*1: Refer to the clause of a difference in input and output voltage.

*2: I_{S1} is specified at the 5% drop point of output voltage V_o on the condition that V_{IN} = overcurrent protection starting current, $I_o = 10\text{ mA}$.

*3: Output is OFF when the output control terminal V_c is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.

Attention ...


SI-3120KM cannot be used in the following applications because the built-in foldback-type overcurrent protection may cause errors during start-up stage;

(1) Constant current load (2) Positive and negative power supply (3) Series-connected power supply (4) V_o adjustment by raising ground voltage

As $PD = (V_{IN} - V_o) \times I_o$, $V_{IN}(\text{max.})$ and $I_o(\text{max.})$ must be referred to the data of p.17, copper area vs power dissipation upon actual applications.


● 2-3 Circuit Diagram

2-3-1 Block Diagram

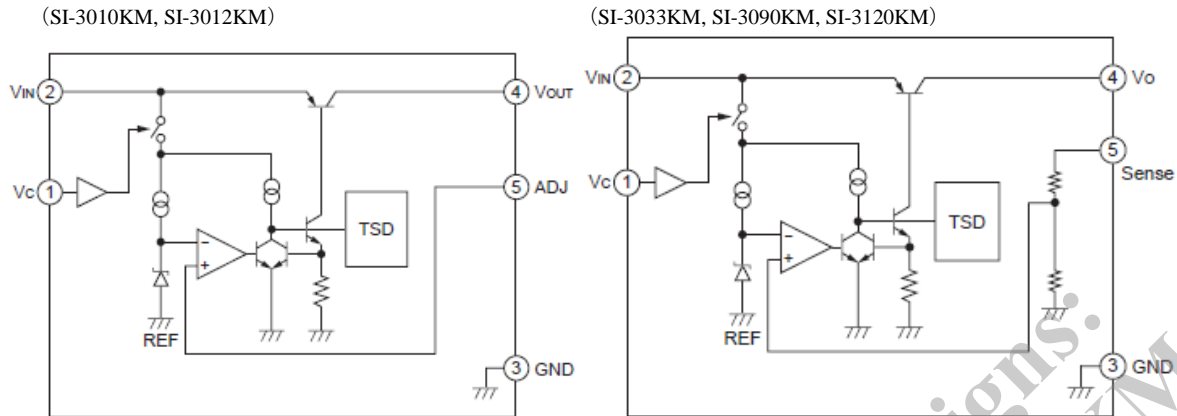


2-3-2 Typical Connection Diagram

(SI-3010KM, SI-3012KM)

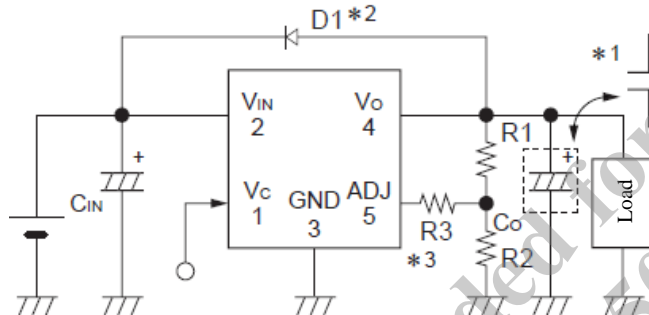

(SI-3033KM, SI-3090KM, SI-3120KM)

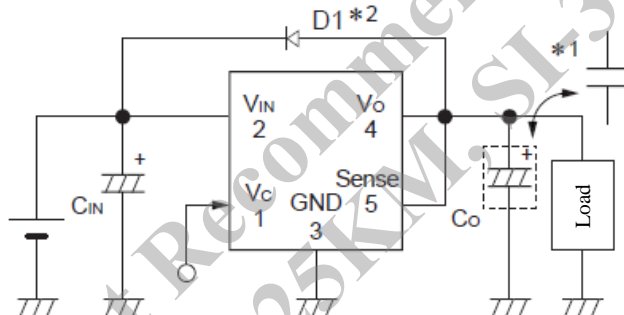

*1 For SI-3012KM, SI-3033KM.

It is the setup to use a ultra-low ESR capacitor such as a ceramics-capacitor for Co with these models. When an electrolytic-capacitor is used for Co, they may oscillate at low-temperature.

*1 For SI-3010KM, SI-3090KM, SI-3120KM.

As for these models, they may oscillate when a ultra-low ESR capacitor such as ceramic-capacitor is used for Co.

*2: D1: Reverse biased protection diodes

In the case of reverse bias between input and output, this diode will be required.

(Recommended diodes: SJPL-H2 made by Sanken)

It is unnecessary in case of $V_o \leq 3.3V$.

R1, R2: resistors for setting output voltages

Output voltages can be adjusted by connecting R1 and R2 as shown in the above figure.

R2: 10 k Ω is recommended. (In case of the SI-3120KM, 24k Ω is recommended.)

$$R1 = (V_o - V_{ADJ}) / (V_{ADJ} / R2)$$

*3: In the case that $V_o \leq 1.5V$ is set, R3 should be inserted. 10k Ω is recommended for R3.

Regardless of the setup voltage, R3 is unnecessary in case of the SI-3012KM.

3. Operational Description

● 3-1 Voltage Control


In the SI-3000KM series, the driving circuit is controlled by comparing the reference voltage with the ADJ terminal voltage (voltage divided by V_o detection resistor in fixed output products) to stabilize the output voltage by varying the voltage between the emitter and collector of a main PNP power transistor. The product of voltage between emitter and collector and the output current at this moment is consumed as heat.

● 3-2 Overcurrent Protection

3-2-1 Overcurrent Protection Characterization for

SI-3012KM, SI-3033KM


The Drooping type overcurrent protection function is provided in these models. In the case of the series regulator, as the output voltage drops subject to the overcurrent protection, the difference of input/output voltages increases to cause significant heating. Special care should be taken for the current limiting type overcurrent protection, since large current flows continuously.

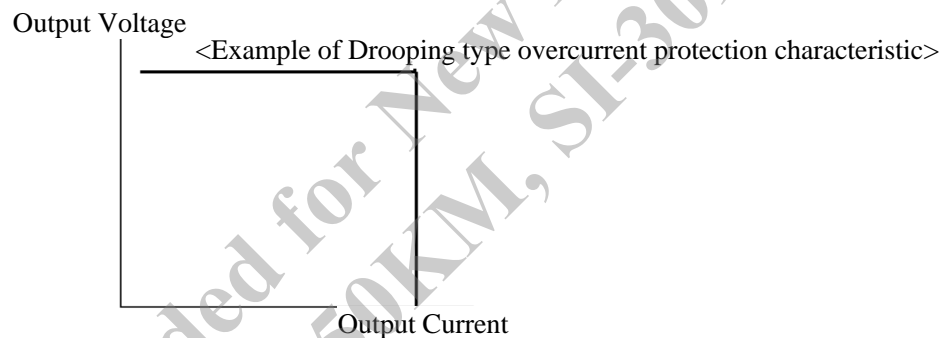

3-2-2 Overcurrent Protection Characterization for SI-3010KM, SI-3090KM, SI-3120KM


The foldback type overcurrent protection function is provided in these models. After operation of the overcurrent protection function, if the load resistance decreases and the output voltage drops, the output current of products is squeezed to reduce the increase of loss. However, in the case of the foldback type overcurrent protection function, since current limiting is also made at start-up, the function may not be used for the following applications, as it may cause a start-up error.

- (1) Constant current loads
- (2) Plus/minus power supply
- (3) DC power supply
- (4) Output voltage adjustment by grounding-up

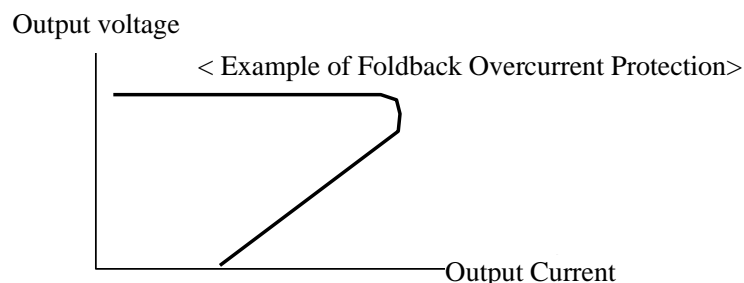

● 3-3 Thermal Shutdown

This IC is provided with the overheat protection circuit which detects the semiconductor junction temperature of the IC to limit the driving current, when the junction temperature exceeds the set value (around 150°C). Since the minimum operating temperature of the overheat protection circuit is 130°C, the thermal design of $T_j < 125^\circ\text{C}$ is required. Since the overheat protection has no hysteresis, as soon as the overload state is released and T_j falls below the set temperature, the normal operation is automatically restored. When the overheat protection function is operated in the overload state, the output voltage falls, but at the same time the output current is decreased and in the consequence, overheat protection operation and automatic restoration are repeated in a short interval, resulting eventually in the waveforms of output voltage oscillation.

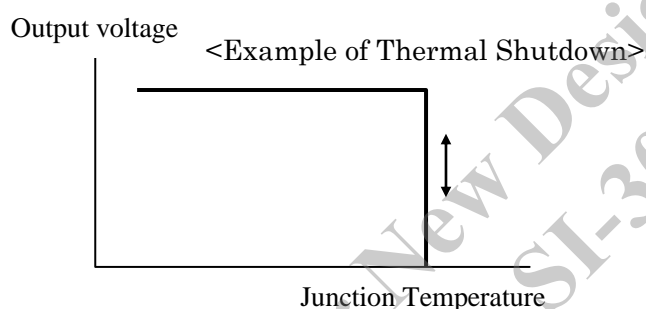

*Note for thermal shutdown characteristic

This circuit protects the IC against overheat resulting from the instantaneous short circuit, but it should be noted that this function does not assure the operation including reliability in the state that overheat continues due to long time short circuit.

4. Cautions

● 4-1 External Components

4-1-1 Input Capacitor C_{IN}

The input capacitor is required to eliminate noise and stabilize the operation and values of 0.47μF - 22μF are recommended. Any of ceramic capacitors or electrolytic ones may be used for the input capacitor.

4-1-2 Output Capacitor C_O

C_O for SI-3010KM, SI-3090KM, SI-3120KM

In the output capacitor C_O, larger capacitance than the recommended value is required for phase compensation. Equivalent series resistance values (ESR) of capacitors are limited, and depending on products, therefore the type of recommended capacitors is limited.

Recommended ESR values for SI-3010KM, SI-3090KM, SI-3120KM: $2\Omega > \text{ESR} > 0.2\Omega$

It is recommended to use electrolytic capacitors. When capacitors with ultra-low ESR such as ceramic capacitors, functional polymer capacitors, OS-capacitors etc., are used, phase margin is decreased, possibly causing the oscillation of output voltage. Therefore these capacitors can not be used.

C_O for SI-3012KM, SI-3033KM

Using a ceramics capacitor and a function polymer capacitor, OS-capacitor etc., is recommended.

As for these models, when a big-ESR capacitor such as electrolytic-capacitors was used, phase margin is decreased and possibly causing the oscillation of output voltage. ESR's increase in the low temperature condition. Therefore,

an electrolytic-capacitor can't be recommended because output may oscillate at a low temperature even when the output doesn't oscillate at a room temperature.

4-1-3 Reverse bias protection diode D1

In the case of falling-down of the input voltage, it is recommended to insert a protection diode D1 against the reverse bias between input and output. However, in the case of setting the V_{out} < 3.3V or lower, D1 is not required including the case of reverse bias. In order to select a suitable D1, it should be taken into consideration that the diode has adequate forward current withstand voltage against the instantaneous discharge of energy stored in output capacitor C_O.

The permissible value of the forward current per unit time of diode is specified in I_{FSM} (A) and in the case of our diode, it is specified at 50Hz half wave (10 ms), but it should be noted that different companies may specify different times. The selection of diode should be made by converting the specified time into the actual discharging time so as to meet the required I_{FSM} (A). The discharging time of C_O is normally shorter than 1ms, but it is recommended to do the conversion with 1ms in consideration of margin.


For conversion into I_{FSM}, calculation should be made by using the equations (1) and (2).

$$\left(\frac{I_{FSM}}{\sqrt{2}} \right)^2 * t_1 = X \quad \text{--- (1)} \quad \text{As for } I_{FSM}, \text{ please refer to the catalog of each company.}$$

t₁ = specified time in catalog of each company

$$\text{Converted } I_{FSM} = \sqrt{\frac{2 * X}{t_2}} \quad \text{--- (2)} \quad t_2: \text{ converted time (discharging time of } C_O)$$

<Graph 1>

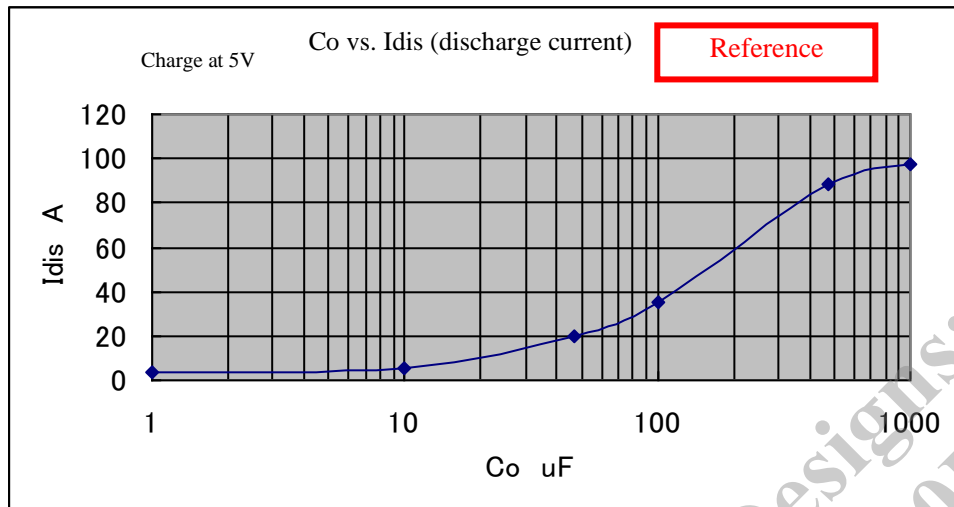

On the assumption of $C_o = 470 \mu\text{F}$, I_{FSM} of around 90 A or more (in 1ms time period) is required and according to our specifications of diode, I_{FSM} is specified for 10ms, therefore the diode of 30 A has the tolerated dose of 94.8 A (in 1 ms) to prove that it is usable.

● 4-2 Pattern Design Notes

4-2-1 Input / Output Capacitor

The input capacitor C1 and the output capacitor C2 should be connected to the IC as close as possible. If the rectifying capacitor for AC rectifier circuit is on the input side, it can be used as an input capacitor. However, if it is no close to the IC, the input capacitor should be connected in addition to the rectifying capacitor.

4-2-2 ADJ Terminal (Output Voltage Set-up for SI-3010KM and SI-3012KM)

The ADJ terminal is a feedback detection terminal for controlling the output voltage. The output voltage set-up is achieved by connecting R1 and R2.

SI-3010KM: it should be set in a manner that I_{ADJ} is around 100 μA .

SI-3012KM: it should be set in a manner that I_{ADJ} is around 50 μA .

R1, R2 and output voltage can be obtained by the following equations:

$$I_{\text{ADJ}} = V_{\text{ADJ}} / R_2 \quad \left(\begin{array}{l} *V_{\text{ADJ}} = 1.0\text{V} \pm 2\% \text{ (SI-3010KM), } R_2 = 10\text{k}\Omega \text{ recommended} \\ *V_{\text{ADJ}} = 1.28\text{V} \pm 3\% \text{ (SI-3012KM), } R_2 = 24\text{k}\Omega \text{ recommended} \end{array} \right)$$

$$R_1 = (V_o - V_{\text{ADJ}}) / I_{\text{ADJ}} \quad R_2 = V_{\text{ADJ}} / I_{\text{ADJ}}$$

$$V_{\text{out}} = R_1 \times (V_{\text{ADJ}} / R_2) + V_{\text{ADJ}}$$

5. Applications

● 5-1 Output ON / OFF Control

The ON/OFF control of output can be made by directly applying voltage to No. 1 Vc terminal. When the Vc terminal is open, the operation is in OFF. The Vc terminal is in OFF below 0.8 V and in ON at above 2V.

● 5-2 Thermal Design

5-2-1 Calculation of heat dissipation


Heat generation of the surface mounting IC is generally dependent on size, material and copper foil area of the mounted printed circuit board. Full attention should be paid to heat dissipation and adequate margin be taken into consideration at thermal design. In order to enhance the heat dissipation effect, it is recommended to enlarge the copper foil area connected to the stem part on the back side of the product. The copper foil area of the printed circuit board significantly affects the heat dissipation effect.

As the junction temperature T_j (max.) is an inherent value, it must be observed strictly. For this purpose, heat sink design (thermal resistance of board) which is appropriate for P_d (max.) and T_a (max.) is required. This is graphically shown in the heat derating curve for easy understanding. The heat dissipation design is done in the following procedure.

- 1) The maximum ambient temperature in the set T_a (max.) is obtained.
- 2) The maximum loss P_d (max.) which varies the input/output conditions is obtained.



$$P_d = (V_{IN} - V_{OUT}) \times I_{OUT}$$
- 3) The area of copper foil is determined from the intersection point in the heat derating curve below shown.

SI-3000KM series derating curve

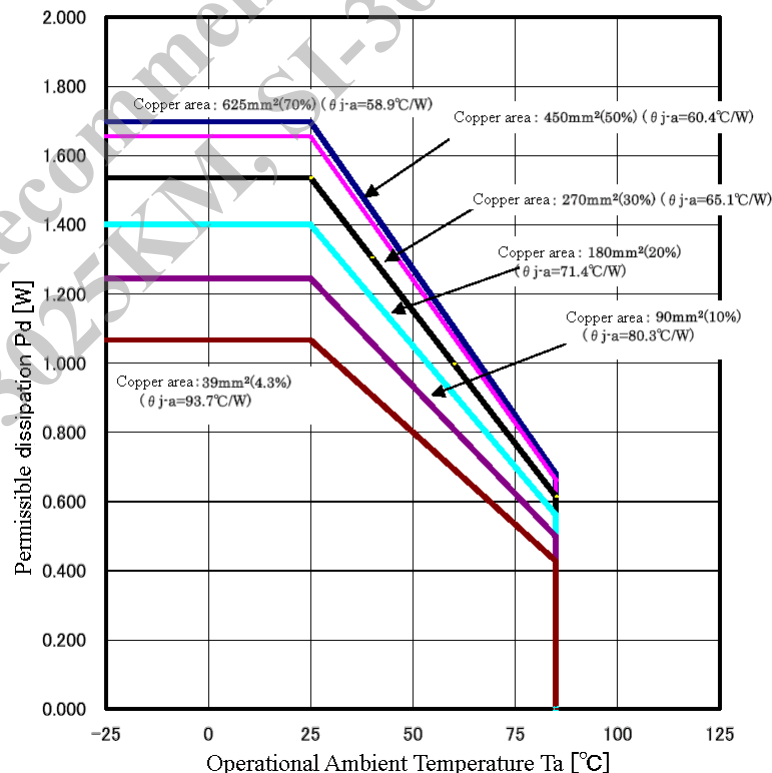

For reference information, the graph of copper foil area vs. thermal resistance between junction temperature and ambient temperature θ_{j-a} and the graph of copper foil area vs. permissible dissipation that both are in the single side copper foil board FR - 4 are shown below.

SI-3000KM Copper area vs. Thermal Resistance





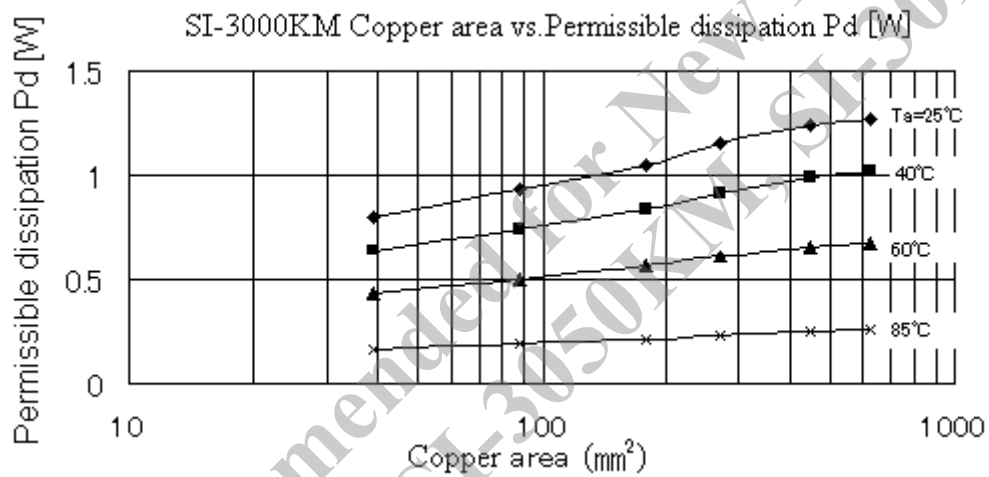
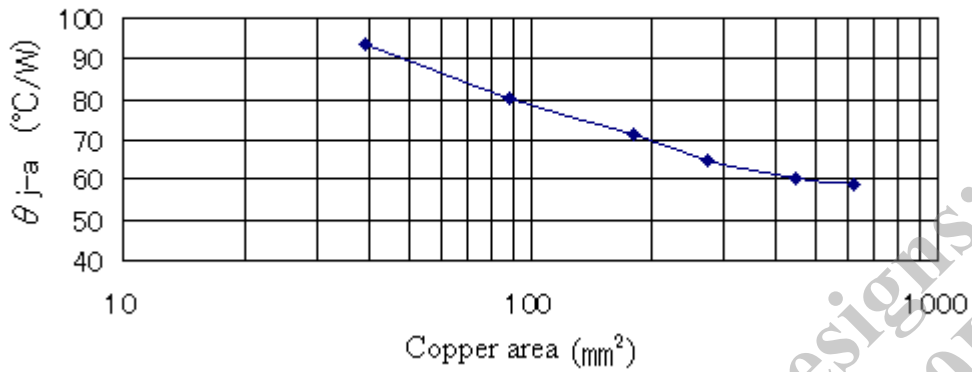






6. Typical Characteristics

6.1 SI-3012KM

($T_a = 25^\circ\text{C}$)







*Set $V_{\text{out}} = 2.5\text{V}$ ($R_2 = 24\text{k}\Omega$)

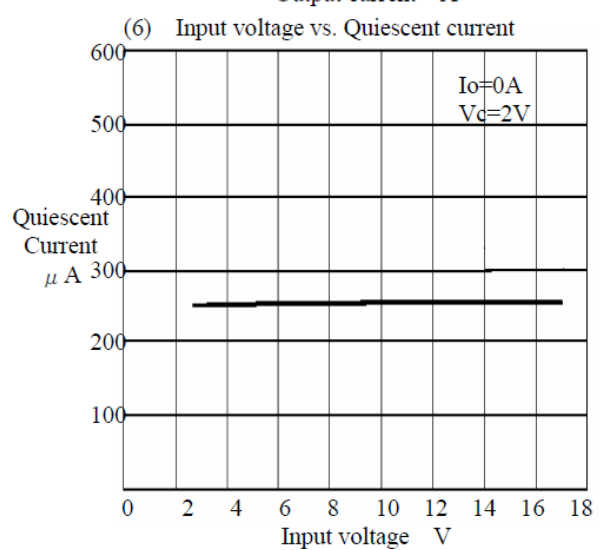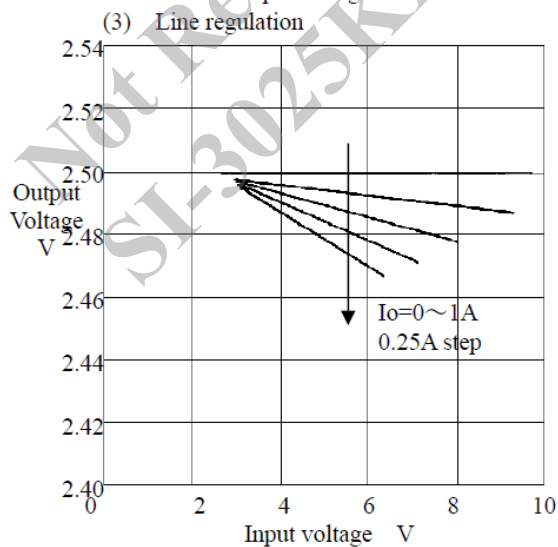
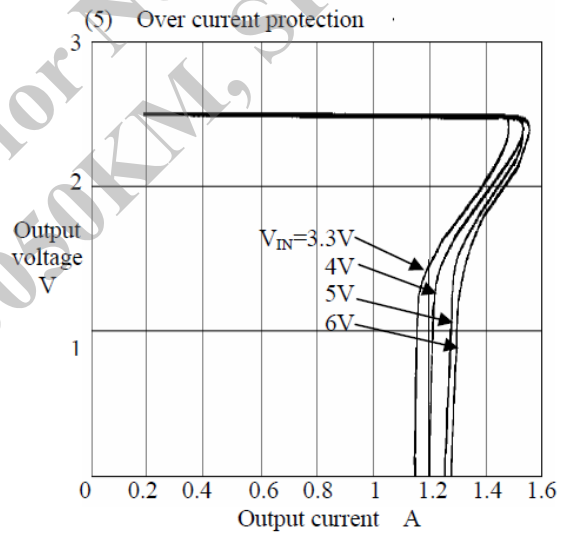
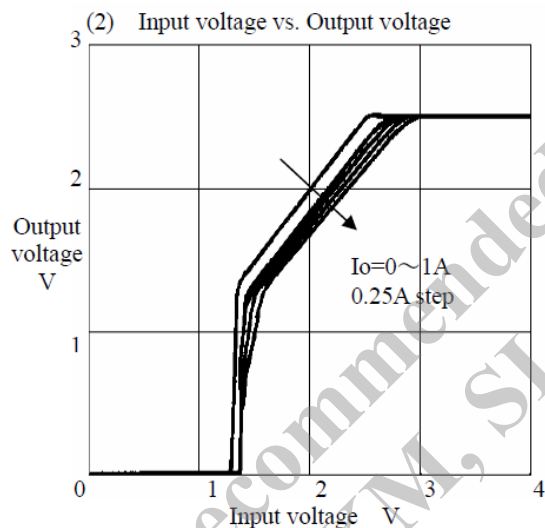
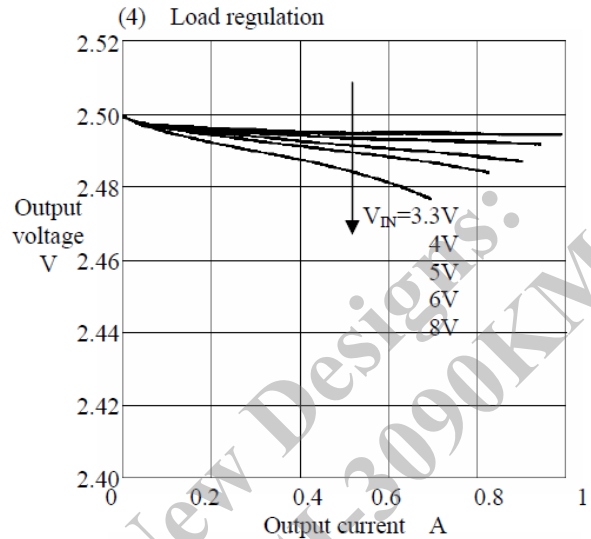
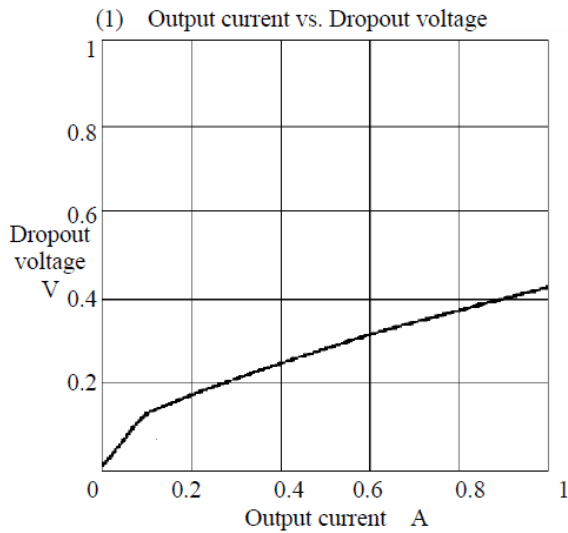


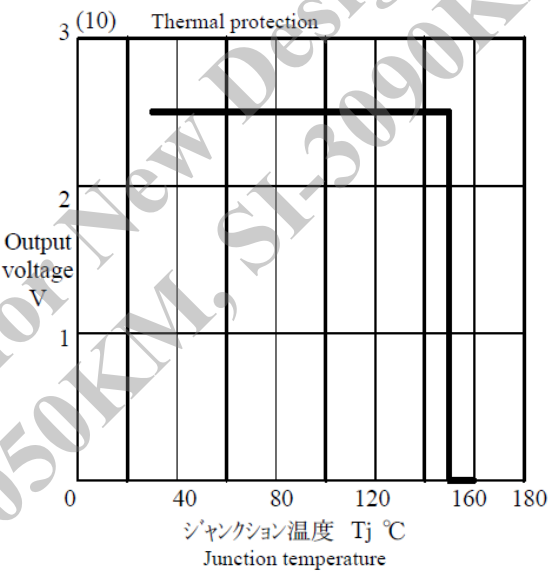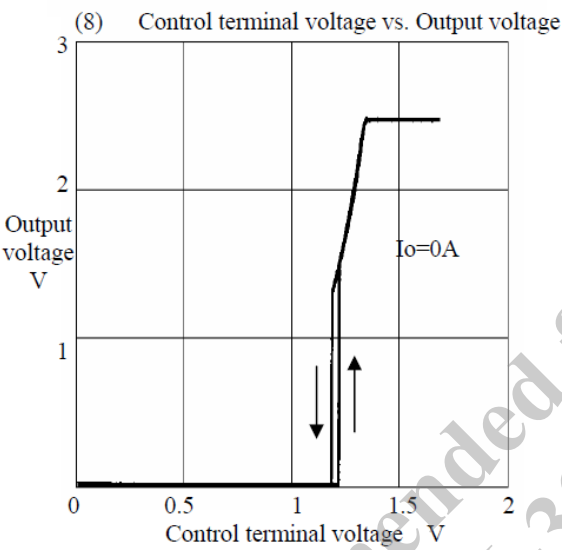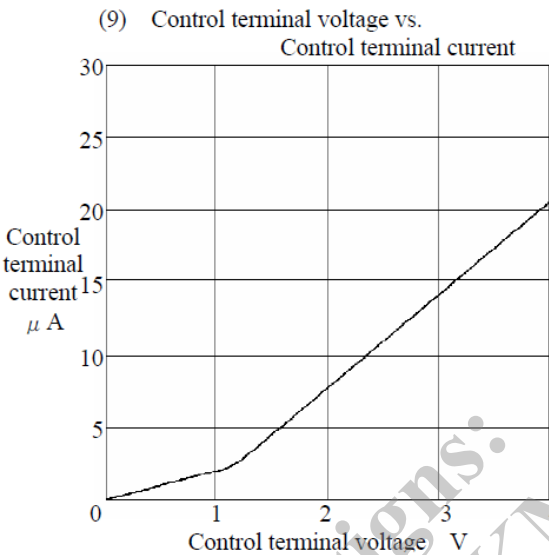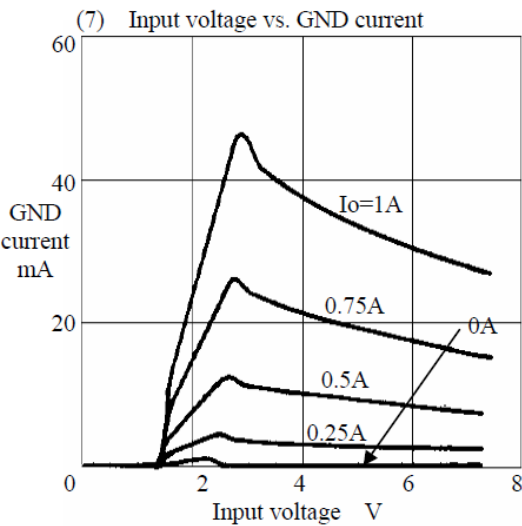

6.2 SI-3010KM

(Ta = 25°C) *Set Vout = 5V (R2 = 10kΩ)

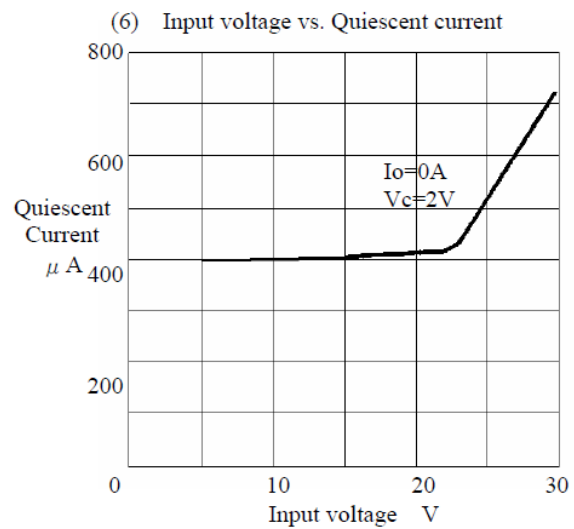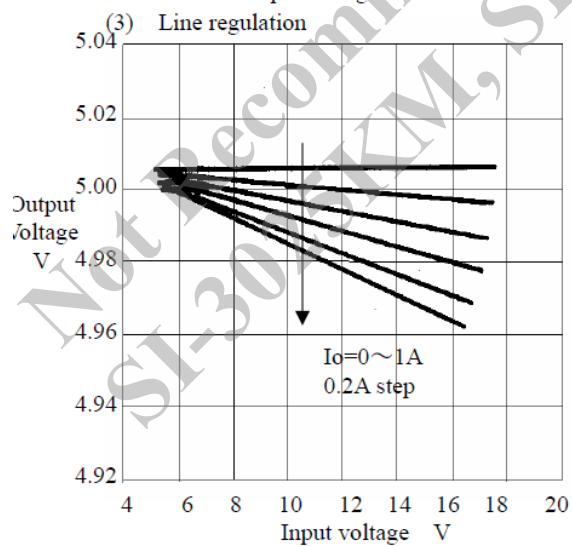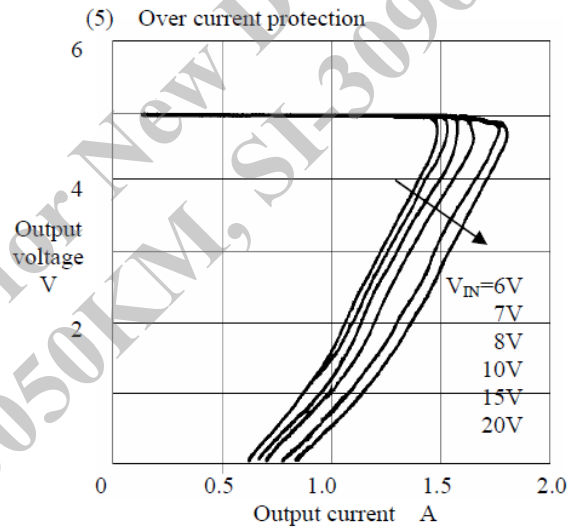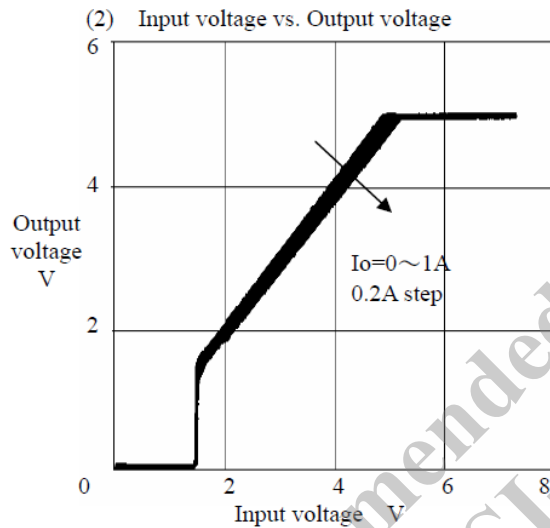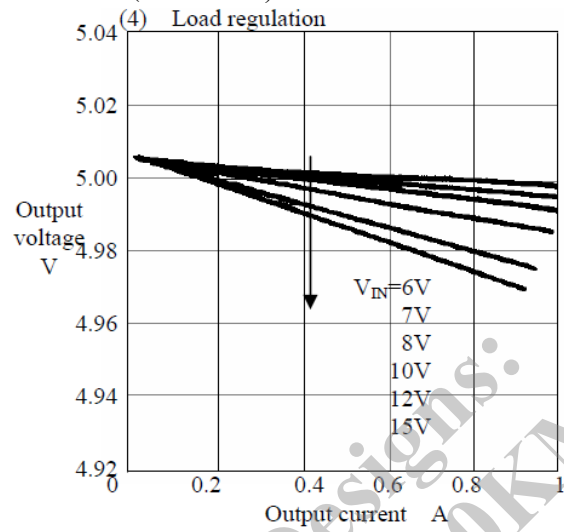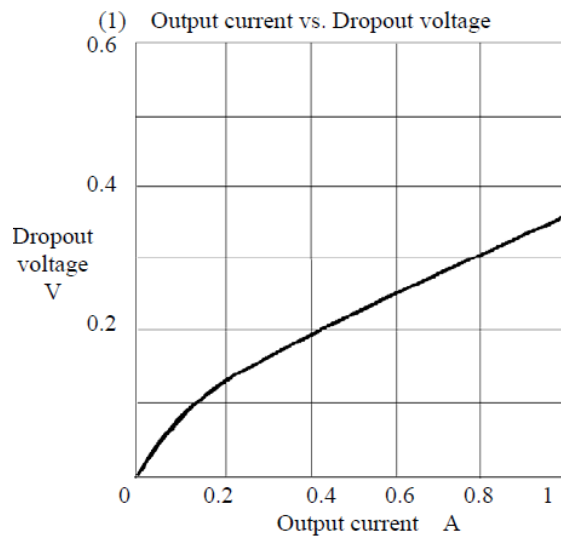

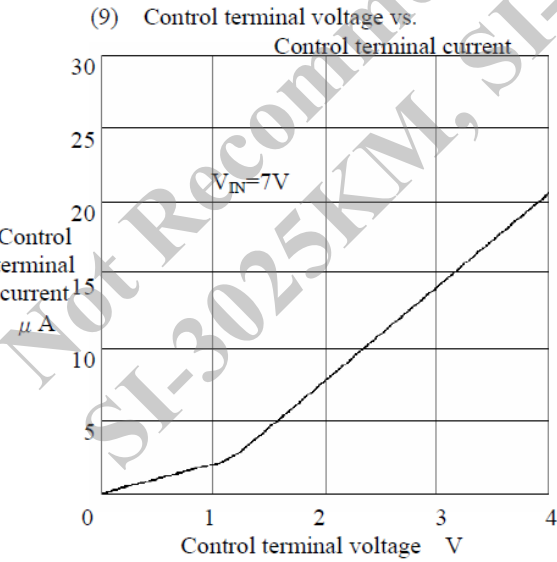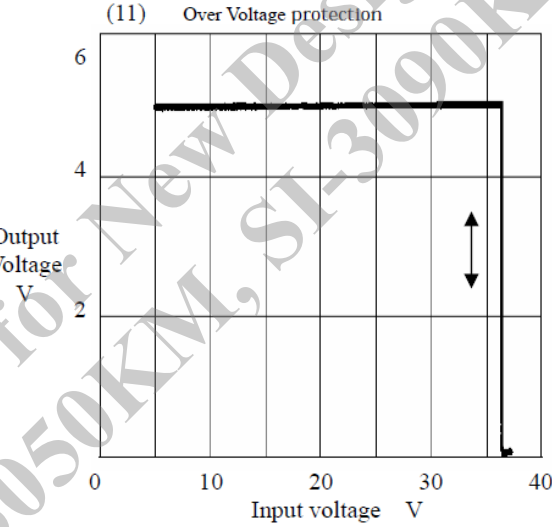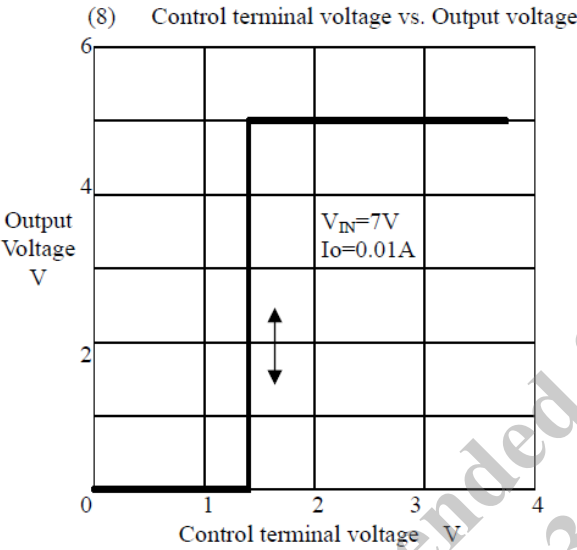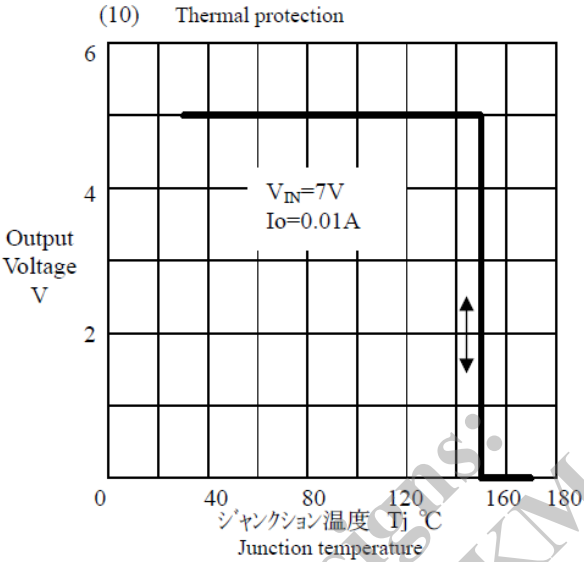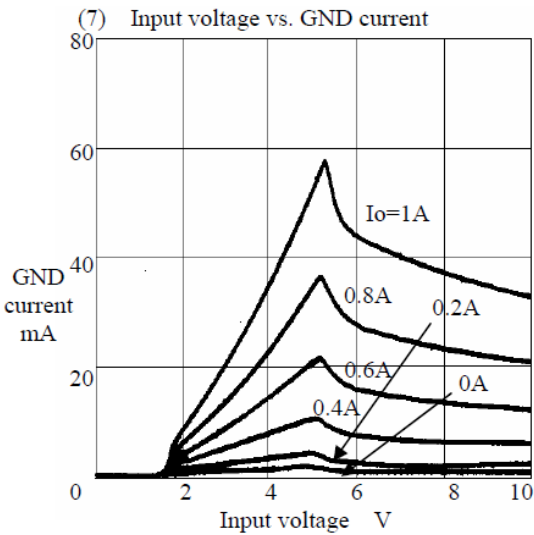

Important Notes

- All data, illustrations, graphs, tables and any other information included in this document (the “Information”) as to Sanken’s products listed herein (the “Sanken Products”) are current as of the date this document is issued. The Information is subject to any change without notice due to improvement of the Sanken Products, etc. Please make sure to confirm with a Sanken sales representative that the contents set forth in this document reflect the latest revisions before use.
- The Sanken Products are intended for use as components of general purpose electronic equipment or apparatus (such as home appliances, office equipment, telecommunication equipment, measuring equipment, etc.). Prior to use of the Sanken Products, please put your signature, or affix your name and seal, on the specification documents of the Sanken Products and return them to Sanken. When considering use of the Sanken Products for any applications that require higher reliability (such as transportation equipment and its control systems, traffic signal control systems or equipment, disaster/crime alarm systems, various safety devices, etc.), you must contact a Sanken sales representative to discuss the suitability of such use and put your signature, or affix your name and seal, on the specification documents of the Sanken Products and return them to Sanken, prior to the use of the Sanken Products. The Sanken Products are not intended for use in any applications that require extremely high reliability such as: aerospace equipment; nuclear power control systems; and medical equipment or systems, whose failure or malfunction may result in death or serious injury to people, i.e., medical devices in Class III or a higher class as defined by relevant laws of Japan (collectively, the “Specific Applications”). Sanken assumes no liability or responsibility whatsoever for any and all damages and losses that may be suffered by you, users or any third party, resulting from the use of the Sanken Products in the Specific Applications or in manner not in compliance with the instructions set forth herein.
- In the event of using the Sanken Products by either (i) combining other products or materials or both therewith or (ii) physically, chemically or otherwise processing or treating or both the same, you must duly consider all possible risks that may result from all such uses in advance and proceed therewith at your own responsibility.
- Although Sanken is making efforts to enhance the quality and reliability of its products, it is impossible to completely avoid the occurrence of any failure or defect or both in semiconductor products at a certain rate. You must take, at your own responsibility, preventative measures including using a sufficient safety design and confirming safety of any equipment or systems in/for which the Sanken Products are used, upon due consideration of a failure occurrence rate and derating, etc., in order not to cause any human injury or death, fire accident or social harm which may result from any failure or malfunction of the Sanken Products. Please refer to the relevant specification documents and Sanken’s official website in relation to derating.
- No anti-radioactive ray design has been adopted for the Sanken Products.
- The circuit constant, operation examples, circuit examples, pattern layout examples, design examples, recommended examples, all information and evaluation results based thereon, etc., described in this document are presented for the sole purpose of reference of use of the Sanken Products.
- Sanken assumes no responsibility whatsoever for any and all damages and losses that may be suffered by you, users or any third party, or any possible infringement of any and all property rights including intellectual property rights and any other rights of you, users or any third party, resulting from the Information.
- No information in this document can be transcribed or copied or both without Sanken’s prior written consent.
- Regarding the Information, no license, express, implied or otherwise, is granted hereby under any intellectual property rights and any other rights of Sanken.
- Unless otherwise agreed in writing between Sanken and you, Sanken makes no warranty of any kind, whether express or implied, including, without limitation, any warranty (i) as to the quality or performance of the Sanken Products (such as implied warranty of merchantability, and implied warranty of fitness for a particular purpose or special environment), (ii) that any Sanken Product is delivered free of claims of third parties by way of infringement or the like, (iii) that may arise from course of performance, course of dealing or usage of trade, and (iv) as to the Information (including its accuracy, usefulness, and reliability).
- In the event of using the Sanken Products, you must use the same after carefully examining all applicable environmental laws and regulations that regulate the inclusion or use or both of any particular controlled substances, including, but not limited to, the EU RoHS Directive, so as to be in strict compliance with such applicable laws and regulations.
- You must not use the Sanken Products or the Information for the purpose of any military applications or use, including but not limited to the development of weapons of mass destruction. In the event of exporting the Sanken Products or the Information, or providing them for non-residents, you must comply with all applicable export control laws and regulations in each country including the U.S. Export Administration Regulations (EAR) and the Foreign Exchange and Foreign Trade Act of Japan, and follow the procedures required by such applicable laws and regulations.
- Sanken assumes no responsibility for any troubles, which may occur during the transportation of the Sanken Products including the falling thereof, out of Sanken’s distribution network.
- Although Sanken has prepared this document with its due care to pursue the accuracy thereof, Sanken does not warrant that it is error free and Sanken assumes no liability whatsoever for any and all damages and losses which may be suffered by you resulting from any possible errors or omissions in connection with the Information.
- Please refer to our official website in relation to general instructions and directions for using the Sanken Products, and refer to the relevant specification documents in relation to particular precautions when using the Sanken Products.
- All rights and title in and to any specific trademark or tradename belong to Sanken and such original right holder(s).